
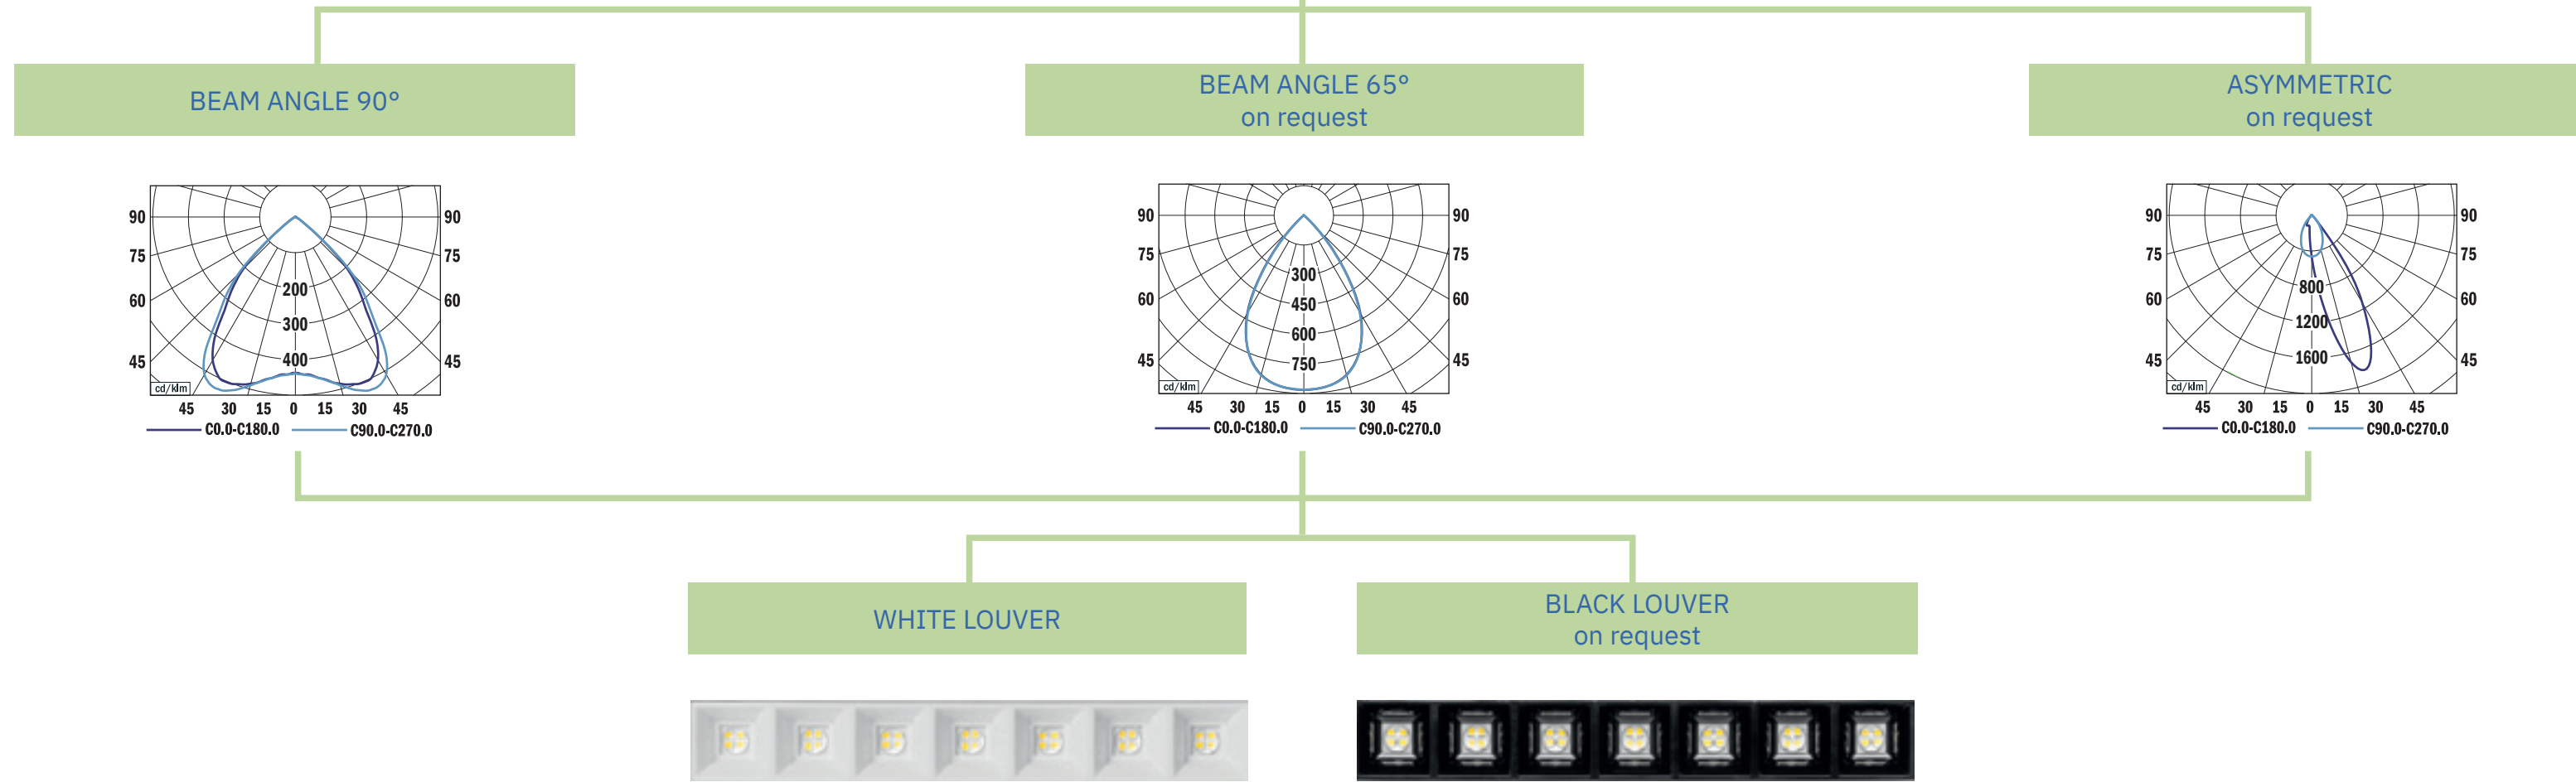


Miline

Specification matrix

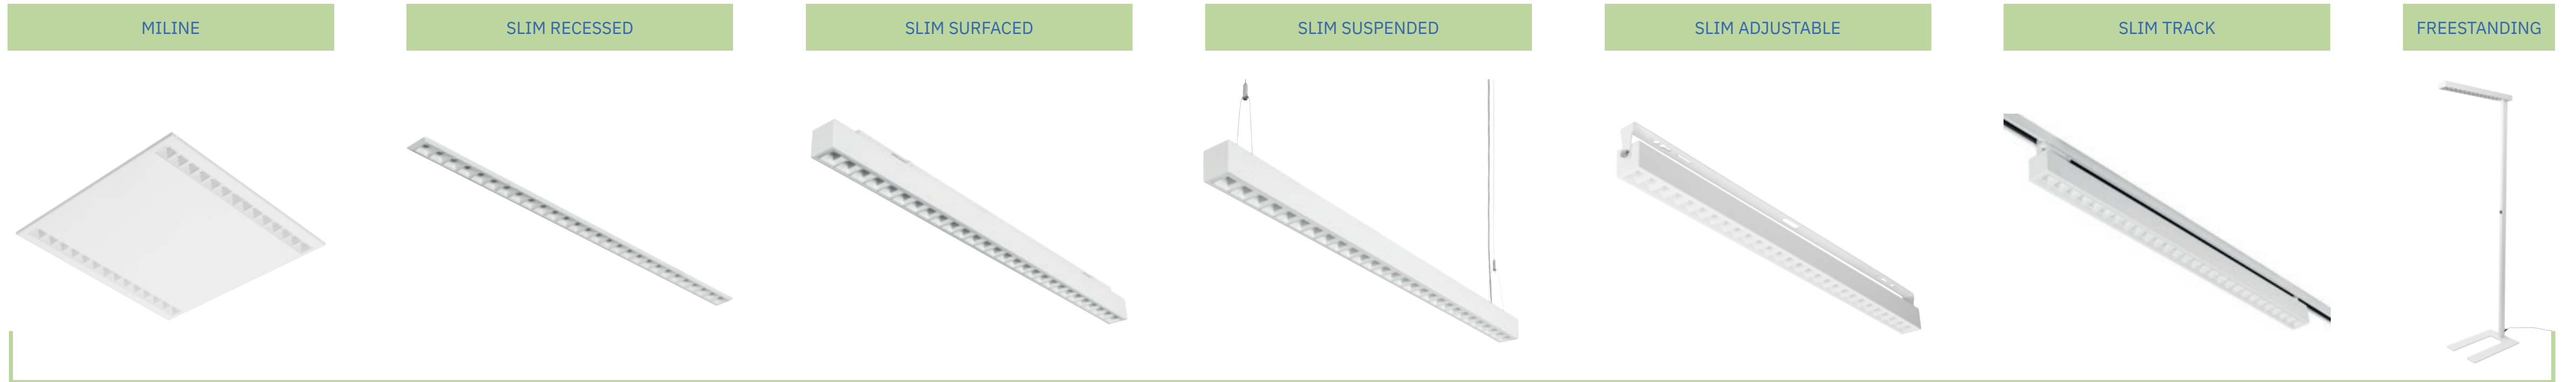

- STANDARD
- CRI XX Ra
- ON REQUEST
- CRI XX Ra
- CRI 80+ Ra
- CRI 90+ Ra
- CCT 2700 K
- CCT 3000 K
- CCT 4000 K
- CCT 5000 K
- CCT 6500 K
- ECG
- EDA DALI
- EMERGENCY

* Luminous flux tolerance +/- 10%. The Company reserves the right to change any product specifications without prior notification.