


# ALASUN

The ALASUN luminaire embodies minimalist elegance with its ultra-thin aluminum profile, allows direct for focused illumination. Offered in four sizes, from a petite 700mm to a majestic 1500mm diameter, ALASUN adapts to various spatial needs. The luminaire's clear design philosophy prioritizes function without sacrificing aesthetics. Additionally, ALASUN integrates seamlessly with DALI dimming systems, empowering you to create the perfect lighting atmosphere at your fingertips. With its versatility and cutting-edge functionality, ALASUN promises to illuminate your space with both style and innovation.



- |                                 |   |
|---------------------------------|---|
| • Light Distribution            | Direct  |
| • Net Lumen Output (at Ta=25°C) | 1500 lm, 1600 lm, 3000 lm, 3250 lm, 1550 lm, 1650 lm, 3050 lm, 3250 lm, 4550 lm, 4850 lm, 4600 lm, 4900 lm, 35 W, 70 W, 105 W |
| • Power Consumption             | 35 W, 70 W, 105 W   |
| • System Efficacy               | 43-47 lm/W  |
| • Chromacity                    | 3-step MacAdam  |
| • Colour rendering index        | > 80  |
| • Colour temperature            | 3000 K, 4000 K  |
| • Wiring                        | FIX, DALI   |
| • Optical System                | Opal diffuser   |
| • Materials                     | Housing: aluminium<br>Diffuser: PMMA  |
| • Surface Finish                | Black   |
| • Service Lifetime (Ta 25°C)    | 60,000 hours/L80/B10  |
| • Ambient Operating Temp.       | From -25 °C to +35 °C   |

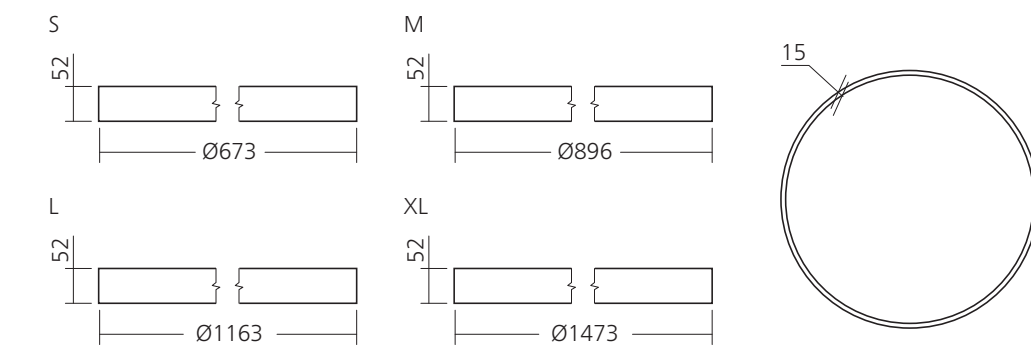

220-240V 50-60Hz	LED	CHROMATICITY 3 SDCM	CRI 80+ Ra	CCT 3000 K	CCT 4000 K	ECG	EDA DALI	IP 40
---------------------	-----	---------------------------	------------------	------------------	------------------	-----	-------------	----------