


ESO Trax

The ESO Trax luminaire is another excellent choice for adaptable lighting solutions. Its unique design combines lenses and louvers to provide optimal light distribution. You can also choose from three different distribution patterns to perfectly match your needs. Easy to mount on the TRAX track system, ensuring quick and hassle-free installation.

Perhaps the most distinct feature is its low-profile, and design, which makes it ideal for adding devices like sensors. This allows you to create a truly versatile lighting solution that can be customized to your specific requirements.



- Net Lumen Output (at Ta=25°C) 3250 lm, 3400 lm, 4550 lm, 4800 lm, 4050 lm, 4300 lm, 5650 lm, 6000 lm
- Power Consumption 22 W, 30 W, 26 W, 37 W
- System Efficacy 148-165 lm/W
- Chromacity 3-step MacAdam
- Colour rendering index > 80
- Colour temperature 3000 K, 4000 K
- Wiring FIX, DALI
- Optical System Lenses + black louvre
- Beam Angle (C0-180, C90-270) 80°
- Materials Housing: sheet steel
Lenses: PMMA
Louvre: polycarbonate
- Surface Finish Black RAL 9005
- Service Lifetime (Ta 25°C) 100,000 hours/L80/B10
- Ambient Operating Temp. From -25 °C to +35 °C
- On Request Asymmetric, Beam angle 65°

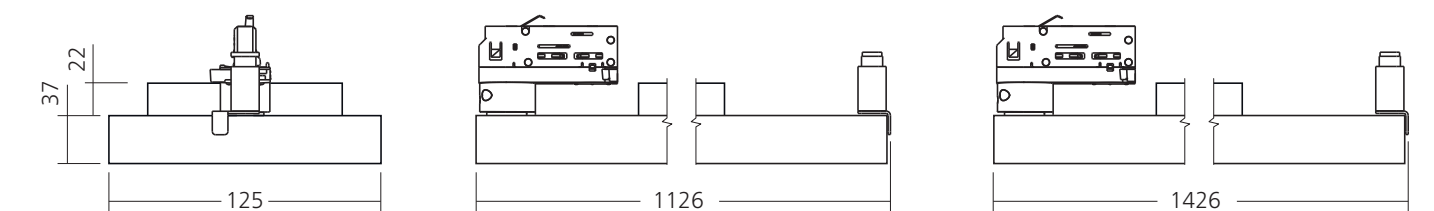

220-240V 50-60Hz	LED	CHROMATICITY 3 SDCM	CRI 80+ Ra	CCT 3000 K	CCT 4000 K	ECG	EDA DALI	IP 20
---------------------	-----	---------------------------	------------------	------------------	------------------	-----	-------------	----------