



LAMBDA FREESTANDING

The Lambda Freestanding luminaire boasts a microprismatic diffuser, bathing your space in a blanket of soft, even light. Its innovative design prioritizes flexibility – equipped with wheels for effortless repositioning, it adapts to ever-changing needs. The 70/30 uplight/downlight ratio provides a perfect balance of task and ambient illumination, while user-friendly touch dimming grants intuitive control over brightness. Furthermore prioritizes comfort with its low UGR rating, minimizing glare for a pleasant visual experience. This versatile luminaire is ideal for modern office layouts, or any space demanding adjustable lighting.

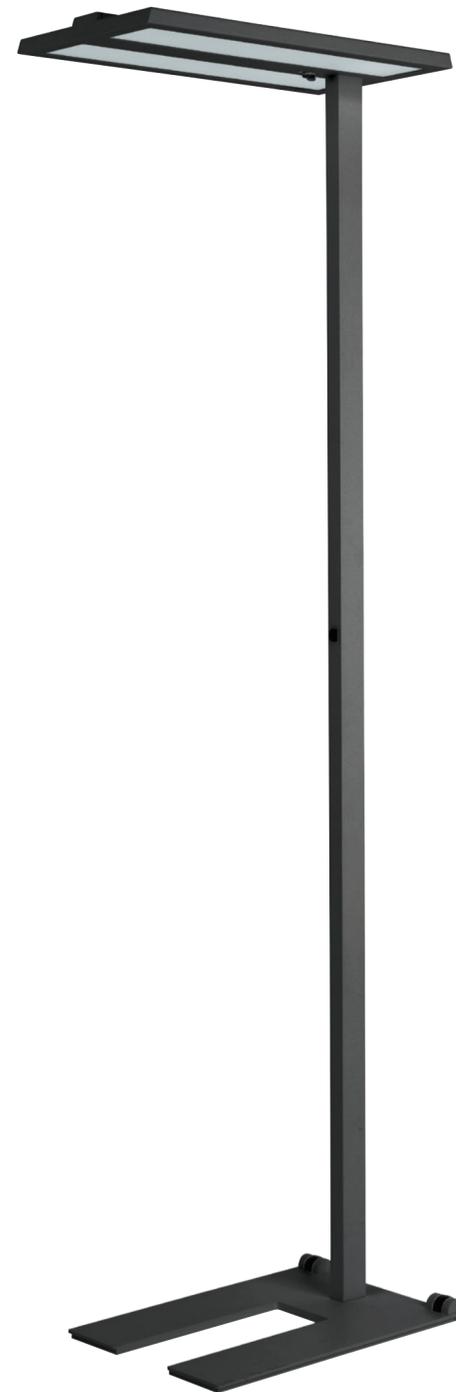

- Light Distribution: Direct-Indirect (31%-69%)
- Net Lumen Output (at Ta=25°C): 7050 lm
- Power Consumption: 48 W
- System Efficacy: 147 lm/W
- Chromacity: 3-step MacAdam
- Colour rendering index: > 80
- Colour temperature: 4000 K
- Wiring: TOUCH DIM
- Optical System: DIRECT: microprismatic diffuser
INDIRECT: microprismatic diffuser
- Materials: Housing: die-cast aluminium + sheet steel
Diffuser: PMMA
- Surface Finish: Black
- Service Lifetime (Ta 25°C): 100,000 hours/L80/B10
- Ambient Operating Temp.: From -20 °C to +40 °C



| | | | | | | |
|---------------------|-----|---------------------------|------------------|------------------|------------------|----------|
| 220-240V 50-60Hz | LED | CHROMATICITY 3 SDCM | CRI 80+ Ra | CCT 4000 K | ETD TOUCH DIM | IP 40 |
|---------------------|-----|---------------------------|------------------|------------------|------------------|----------|