



LUVIAN D-I

The LUVIAN D-I luminaire is a paragon of minimalist elegance. Defined by its clean lines and functional design, the LUVIAN D-I prioritizes form following function. Crafted from high-quality aluminum, its housing exudes a timeless elegance.

Light is distributed in a balanced 50/50 direct-indirect fashion, bathing your space in a functional and inviting illumination. The LUVIAN D-I caters to a variety of needs, offering five lengths to perfectly complement any setting. Suspended from the ceiling, it becomes a seamless addition, enhancing your space with a touch of understated luxury.

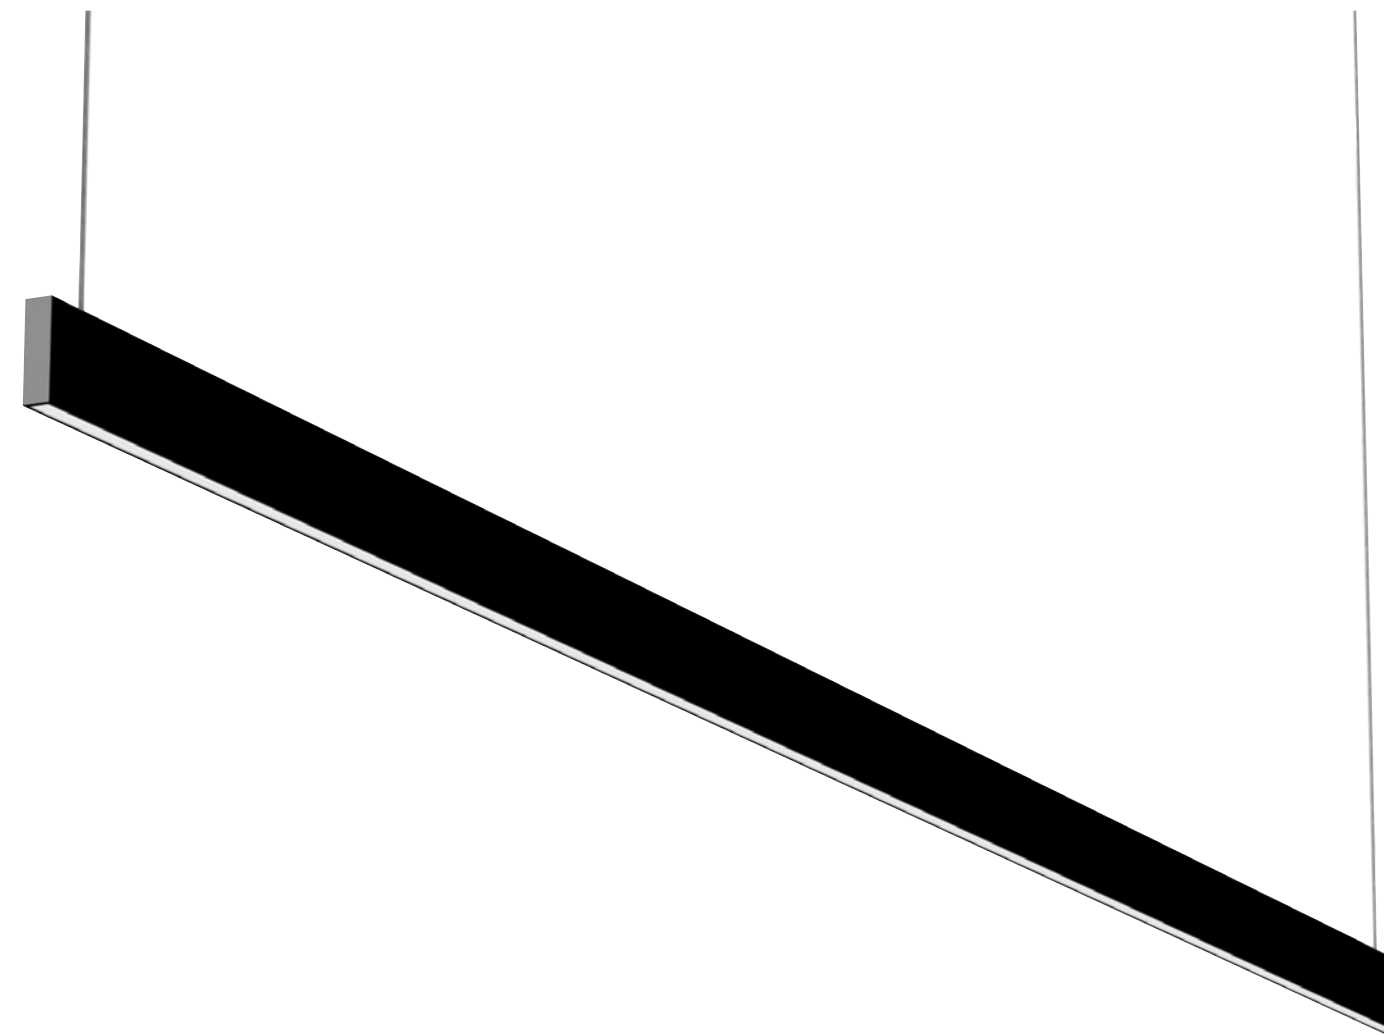

- | | |
|---------------------------------|--|
| • Light Distribution | Direct-Indirect (50%-50%) |
| • Net Lumen Output (at Ta=25°C) | 750 lm, 800 lm, 1100 lm, 1150 lm, 1550 lm, 1650 lm, 2000 lm, 2100 lm, 2300 lm, 2450 lm |
| • Power Consumption | 20 W, 25 W, 35 W, 40 W, 50 W |
| • System Efficacy | 38-53 lm/W |
| • Chromacity | 3-step MacAdam |
| • Colour rendering index | > 80 |
| • Colour temperature | 3000 K, 4000 K |
| • Wiring | FIX, DALI |
| • Optical System | Opal diffuser |
| • Materials | Housing: aluminium
Diffuser: PMMA |
| • Surface Finish | Black |
| • Service Lifetime (Ta 25°C) | 60,000 hours/L80/B10 |
| • Ambient Operating Temp. | From -25 °C to +35 °C |

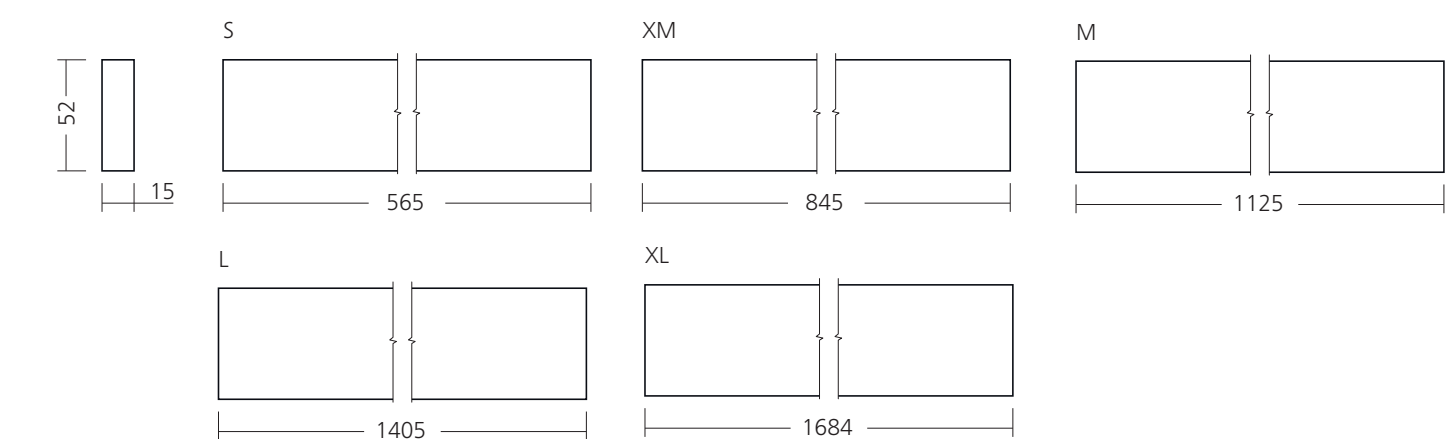

220-240V 50-60Hz	LED	CHROMATICITY 3 SDCM	CRI 80+ Ra	CCT 3000 K	CCT 4000 K	ECG	EDA DALI	IP 40
---------------------	-----	---------------------------	------------------	------------------	------------------	-----	-------------	----------