



MILINE FREESTANDING

It is designed to be the perfect lighting solution for modern offices. It boasts a unique direct-indirect light distribution, providing task lighting and ambient illumination. The direct portion utilizes a combination of lenses and louvers to ensure focused illumination on desks and work surfaces. At the same time, the indirect component employs an opal diffuser to bathe the room in soft, diffused light. This combination creates a comfortable and productive work environment.

Additionally, the Miline Freestanding features a convenient touch-dimming function, allowing users to adjust the light level to their preference easily.

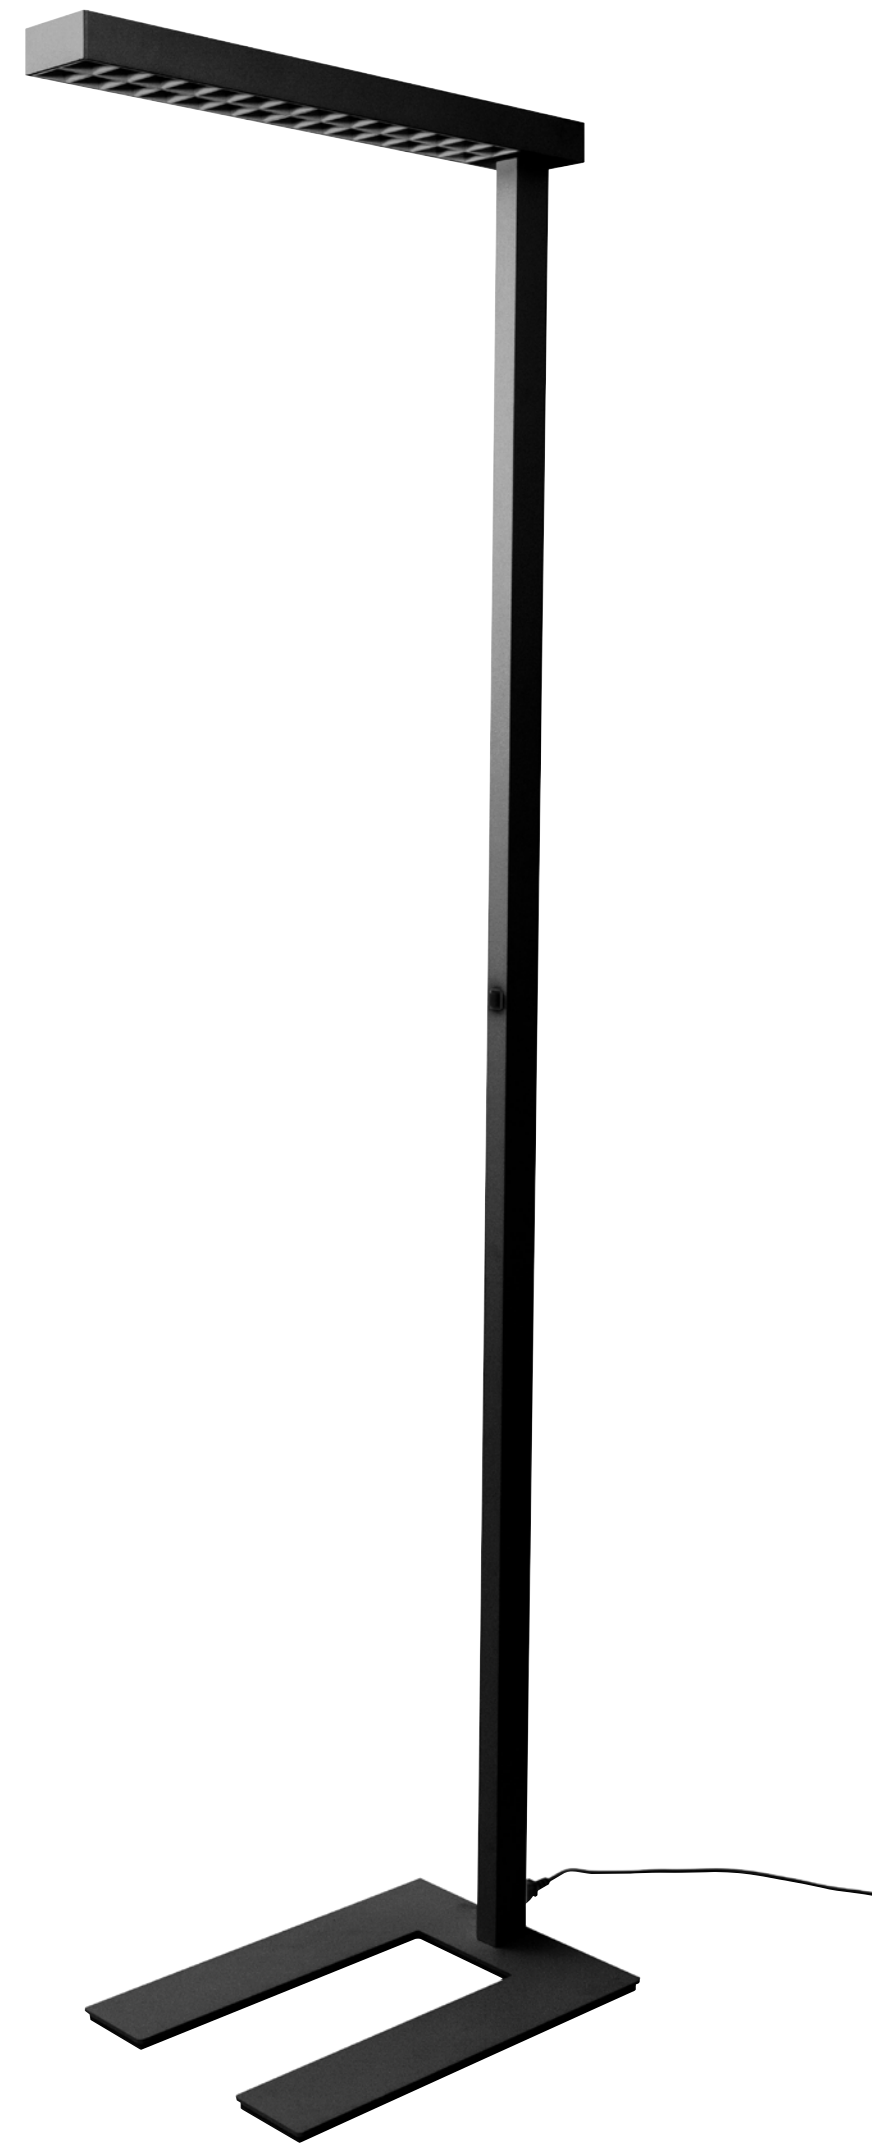

- | | |
|---------------------------------|--|
| • Light Distribution | Direct-Indirect (42%-58%) |
| • Net Lumen Output (at Ta=25°C) | 10,500 lm |
| • Power Consumption | 76 W |
| • System Efficacy | 138 lm/W |
| • Chromacity | 3-step MacAdam |
| • Colour rendering index | > 80 |
| • Colour temperature | 4000 K |
| • Wiring | TOUCH DIM |
| • Optical System | DIRECT: lenses + louver
INDIRECT: opal diffuser |
| • Materials | Housing: die-cast aluminium + sheet steel
Lenses: PMMA
Louver: polycarbonate
Diffuser: PMMA |
| • Surface Finish | Black |
| • Service Lifetime (Ta 25°C) | 100,000 hours/L80/B10 |
| • Ambient Operating Temp. | From -25 °C to +35 °C |

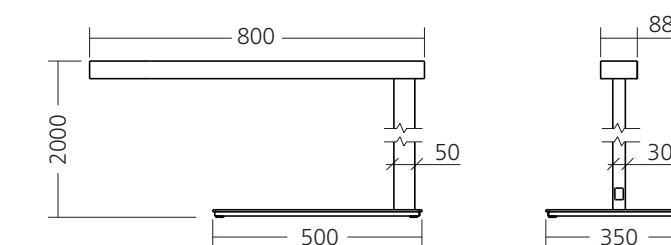

220-240V 50-60Hz	LED	CHROMATICITY 3 SDCM	CRI 80+ Ra	CCT 4000 K	ETD TOUCH DIM	IP 20
---------------------	-----	---------------------------	------------------	------------------	------------------	----------