


MILINE SLIM ADJUSTABLE

The Miline Slim Adjustable offers both style and functionality. This versatile fixture provides focused illumination with three beam angle options, allowing you to tailor the light to your specific needs. Additionally, customize glare control with your choice of white or black louvers. Seamlessly integrate the Miline Slim Adjustable into any downlighting application, thanks to its long-lasting performance. Plus, enjoy exceptional adjustability with a +/- 130° tilt range. Whether mounted on the surface, suspended from the ceiling, or installed on the wall, the Miline Slim Adjustable delivers the perfect lighting solution.

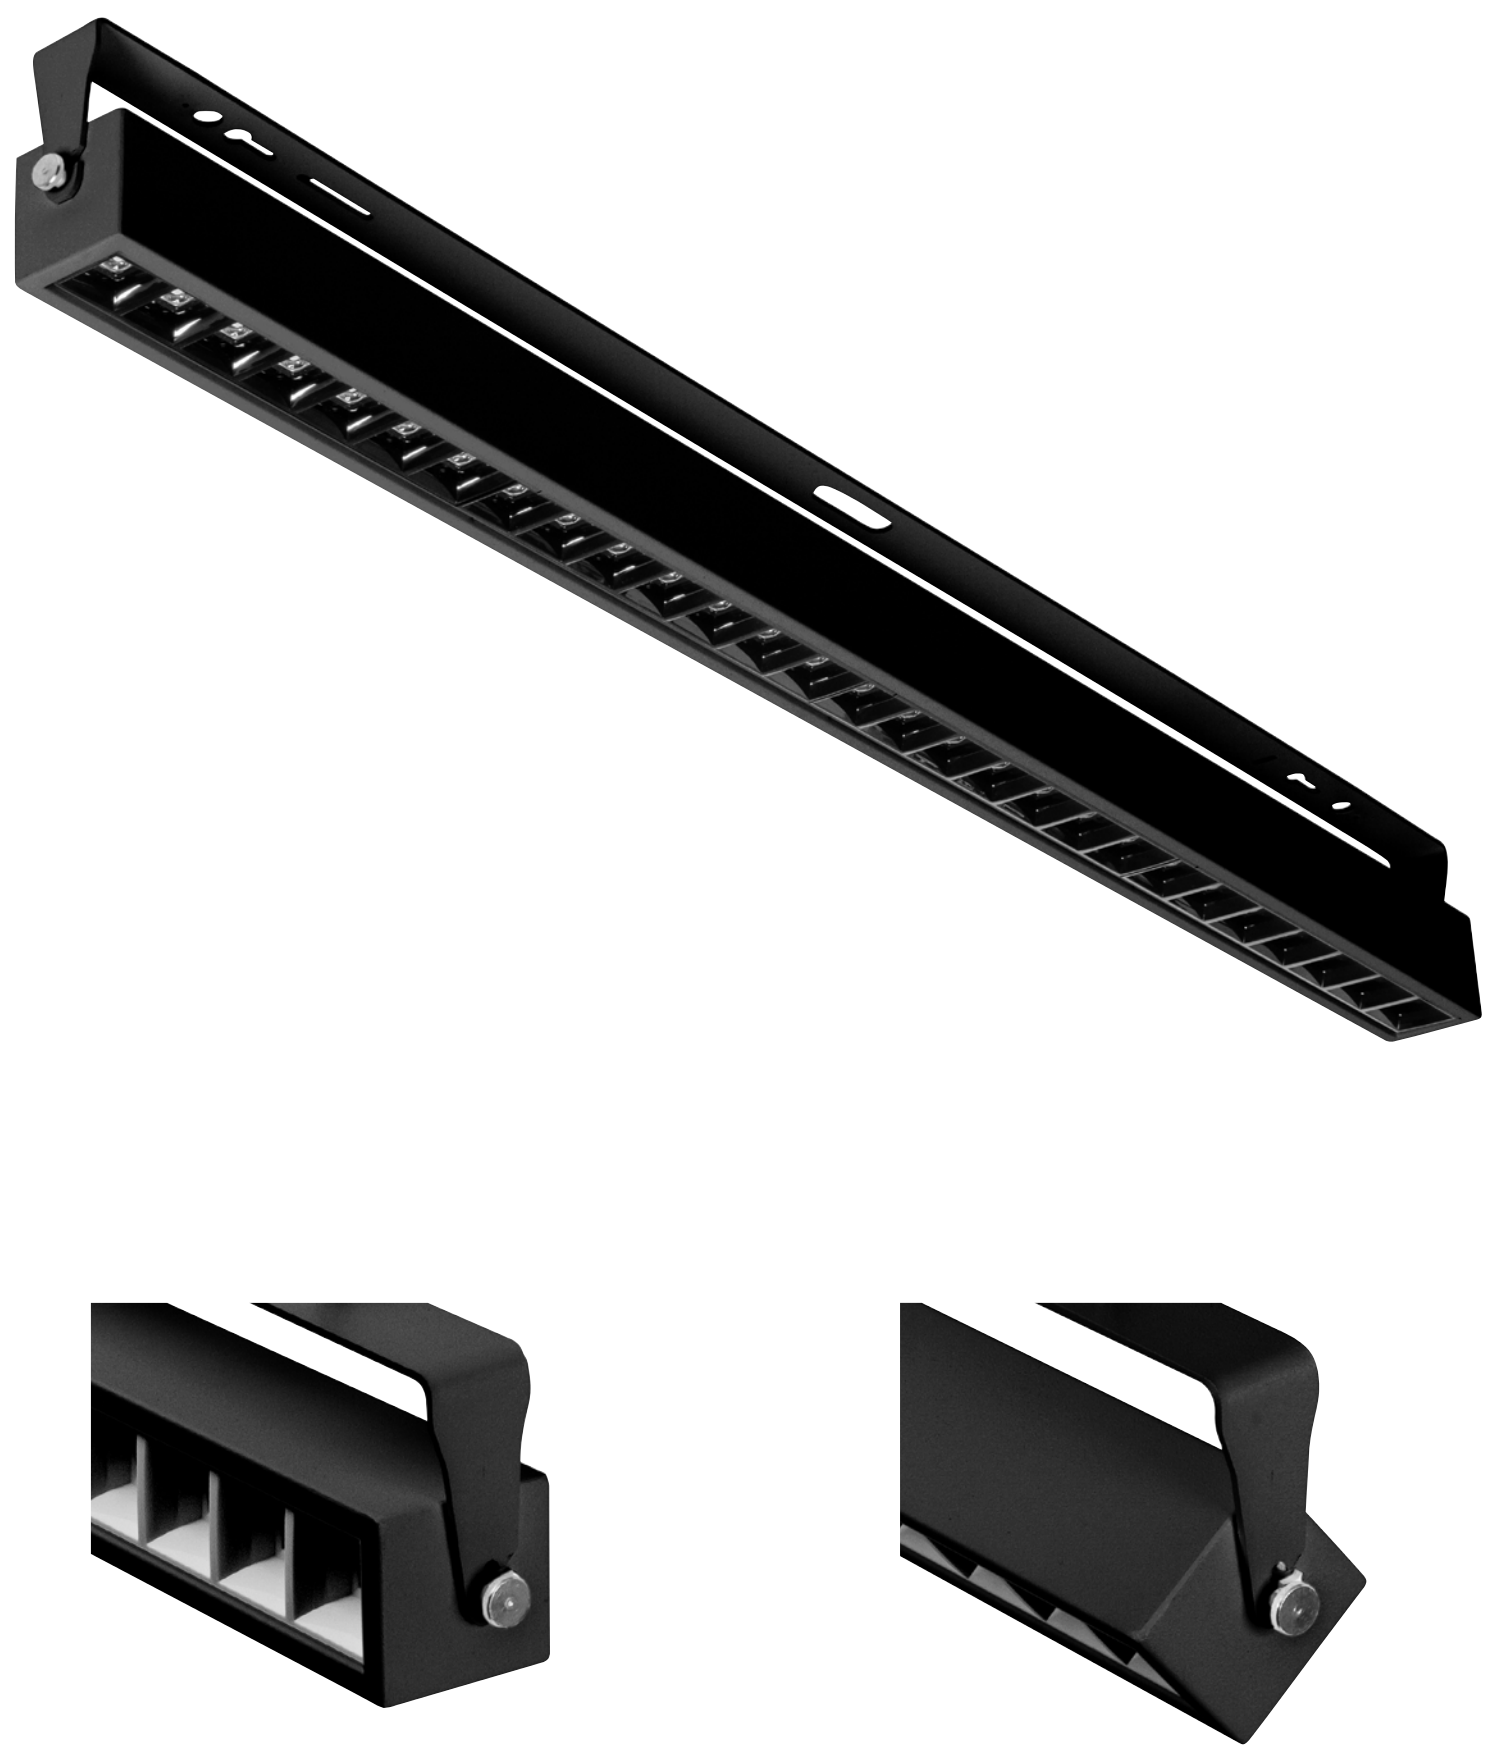

• Light Distribution	Direct
• Net Lumen Output (at Ta=25°C)	3250 lm, 3400 lm, 4050 lm, 4300 lm, 4550 lm, 4800 lm, 5650 lm, 6000 lm
• Power Consumption	22 W, 26 W, 30 W, 37 W
• System Efficacy	148-165 lm/W
• Chromacity	3-step MacAdam
• Colour rendering index	> 80
• Colour temperature	3000 K, 4000 K
• Wiring	FIX, DALI
• Optical System	Lenses + louvre
• Beam Angle (C0-180, C90-270)	90°
• Materials	Housing: sheet steel Lenses: PMMA Louvre: polycarbonate
• Surface Finish	Black
• Service Lifetime (Ta 25°C)	100,000 hours/L80/B10
• Ambient Operating Temp.	From -25 °C to +35 °C

220-240V
50-60Hz

LED

CHROMATICITY
3
SDCM

CRI
80+
Ra

CCT
3000
K

CCT
4000
K

ECG

EDA
DALI

IP
20

