


MILINE SLIM Trax

The MILINE SLIM Trax luminaire is a versatile lighting solution offering style and functionality. Available in two lengths, 1200 mm, and 1500 mm, it can accommodate various lighting needs. Its unique optical design combines lenses and louvers to ensure optimal light distribution, while also providing you with the choice between three different distribution patterns to suit your specific requirements. The luminaire is easy to mount on the TRAX track system, making installation quick and hassle-free. With its simple design, the MILINE SLIM Trax luminaire is a great choice for various applications.



- Net Lumen Output (at Ta=25°C) 3250 lm, 3400 lm, 4550 lm, 4800 lm, 4050 lm, 4300 lm, 5650 lm, 6000 lm
- Power Consumption 22 W, 30 W, 26 W, 37 W
- System Efficacy 148-165 lm/W
- Chromacity 3-step MacAdam
- Colour rendering index > 80
- Colour temperature 3000 K, 4000 K
- Wiring FIX, DALI
- Optical System Lenses + black louvre
- Beam Angle (C0-180, C90-270) 80°
- Materials Housing: sheet steel
Lenses: PMMA
Louvre: polycarbonate
- Surface Finish Black RAL 9005
- Service Lifetime (Ta 25°C) 100,000 hours/L80/B10
- Ambient Operating Temp. From -25 °C to +35 °C
- On Request Asymmetric, Beam angle 65°

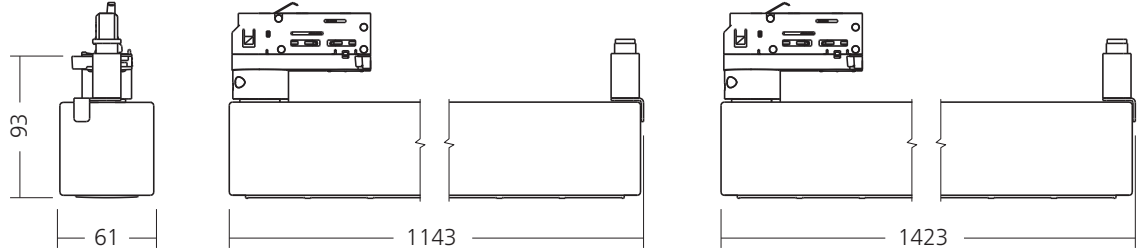

220-240V 50-60Hz	LED	CHROMATICITY 3 SDCM	CRI 80+ Ra	CCT 3000 K	CCT 4000 K	ECG	EDA DALI	IP 20
---------------------	-----	---------------------------	------------------	------------------	------------------	-----	-------------	----------