

# Classic

Surfaced or suspended luminaire with louvers




### Product description

This louvered luminaire is a go-to choice for businesses thanks to its precise light control. Louvers tame the light, directing it down for focused tasks while minimizing glare and eye strain – perfect for offices and other work areas. Installation is a breeze, with surface-mounted or suspended options. For ultimate control, optional DALI dimming lets users personalize their lighting preferences, creating an adaptable and productive environment. Built to last over 100,000 hours, this luminaire shines brightly for years, reducing maintenance costs and environmental impact. It's the perfect blend of performance, comfort, and efficiency.

### Technical features:


- Optical system: matt parabolic louver PAR MAT-V2 (ML2)
- Housing: sheet steel
- Diffuser: PMMA
- Parabolic louver: matt anodised aluminium
- Accesories: rope suspension
- Chromacity: 3-step MacAdam
- Colour rendering index: min. 80
- Colour temperature: 3000K, 4000K
- Electronic control gear: FIX (ECG), DALI (EDA), on request Emergency unit variant
- Service lifetime: 100,000 hours/L90/B10 (ta 25°C)
- Ambient temperature: Ta = -25°C...+35°C
- Degree of protection: IP20
- Dimmensions: M 1198 x 130 x 62 mm, L 1498 x 130 x 62 mm

### Photometry

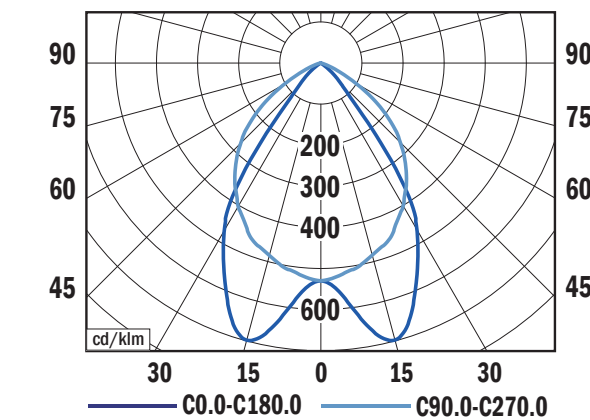


CLASSIC M, 4500 lm 4000 K  
 LOR = 100%  
 lower flux fraction 100%  
 upper flux fraction 0%  
 UGR <16/<19

### Dimmensions

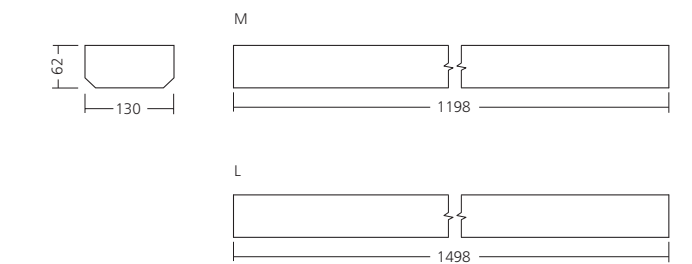

### Mounting



|                     |                  |                           |                  |
|---------------------|------------------|---------------------------|------------------|
| 220-240V<br>50-60Hz | LED              | CHROMATICITY<br>3<br>SDCM | CRI<br>80+<br>Ra |
| CCT<br>3000<br>K    | CCT<br>4000<br>K | ECG                       | EDA<br>DALI      |
| IP<br>20            |                  |                           |                  |



| TYPE      | NET LUMEN OUTPUT<br>(at Ta = 25 °C)<br>(lm) | POWER<br>CONSUMPTION<br>(W) | SYSTEM<br>EFFICACY<br>(lm/W) | COLOUR<br>RENDERING<br>INDEX | CORRELATED<br>COLOUR<br>TEMPERATURE (K) | BEAM<br>ANGLE | WEIGHT<br>(kg) |
|-----------|---|-----------------------------|------------------------------|------------------------------|---|---------------|----------------|
| CLASSIC M | 4300  | 32                          | 134                          | 80+                          | 3000                                    | 65°, 95°      | 3.2            |
| CLASSIC M | 4500  | 32                          | 141                          | 80+                          | 4000                                    | 65°, 95°      | 3.2            |
| CLASSIC L | 6700  | 50                          | 134                          | 80+                          | 3000                                    | 65°, 95°      | 4.1            |
| CLASSIC L | 7050  | 50                          | 141                          | 80+                          | 4000                                    | 65°, 95°      | 4.1            |