

Exit L

Conventional emergency luminaire

Product description

The EXIT family is a conventional emergency luminaire designed to adapt to any installation thanks to the possibility of surface or flush mounting. The minimalist design and maximum functionality make it perfect for both indoor and outdoor use. We used high-quality components for its production, thanks to which the luminaire is distinguished by above-average parameters in terms of luminous flux, allowing for individual selection of luminaires depending on the needs of the future user of the facility. Additionally, when using the HTR-25 system, the EXIT luminaire performs well in difficult environmental conditions (low temperatures).

Technical features:

- Viewing : one-sided or double-sided
- Viewing distance: 30 m
- Housing: white polycarbonate
- Diffuser: transparent polycarbonate
- Colour temperature: 6000K
- Battery: Ni-Cd 3,6V
- Charging max. 24h
- Service lifetime: 50,000 hours
- Ambient temperature: Ta = 0°C...+40°C
- Degree of protection: IP65, IK07
- Dimmensions: 332 x 178 x 52 mm / 332 x 178 x 207 mm
- Universal pictogram is included in each single box (1 piece)
- LED indicator signalizes mains power supply and battery charge
- Deep discharge protection
- Accessories: accessory for recessed mounting (set), accessory for pendant mounting, plexi glass (set), adjustable handle 0-90° , fixture shade (set), wall steel bracket, ceiling steel bracket, ceiling steel bracket with pipe, accessory for rope suspension (set), wire guard



220-240V
50-60Hz

LED

CCT
6000
K

IP
65

IK
07

d = 30 m
VISIBILITY

plexi glass




wire guard




fixture shade



Dimmensions

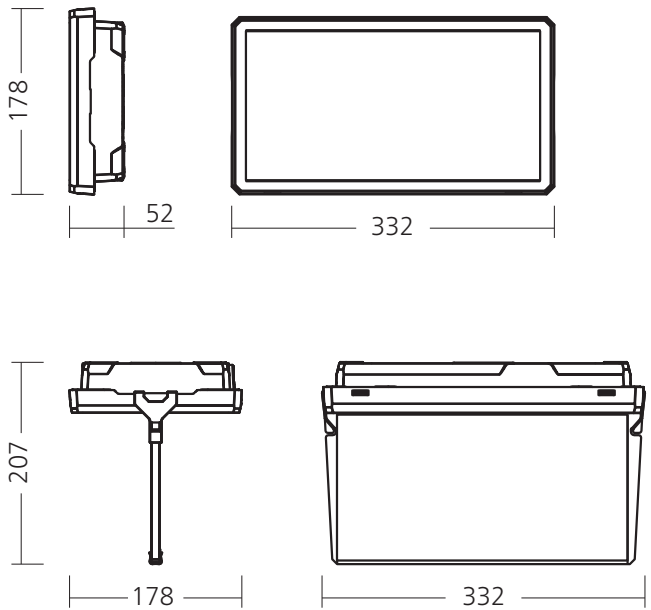

Mounting

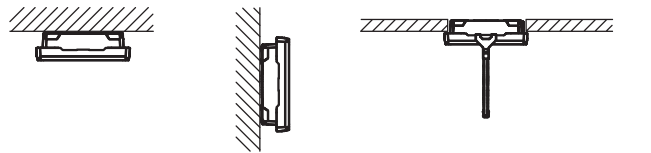

TYPE	POWER (W)	DURATION (h)	MAINTENANCE		OPTIONS	
			NON MAINTAINED	MAINTAINED	MANUAL TEST BUTTON	AUTOTEST
EXIT L	1	3	•	•	•	•
EXIT L	2	3	•	•	•	•