

Helios

Conventional emergency luminaire

Product description

HELIOS is a type of emergency or escape-sign luminaire designed for surface mounting, with ceiling/wall/ceiling pipe bracket, on choice with a protected wire guard (to get IK10) as an accessory. For its production, we used high-quality components and extremely efficient light sources, which means that above-average parameters distinguish the luminaire in terms of luminous flux. It was developed to meet the needs of the most demanding installations. High IP (IP65) and a wide range of versions make it the perfect choice for large industrial areas, tunnels, or parking lots.


Technical features:

- Viewing : one-sided
- Viewing distance: 25 m
- Housing: white polycarbonate
- Diffuser: opal polycarbonate
- Colour temperature: 6000K
- Battery: Ni-Cd 3,6V
- Charging max. 24h
- Service lifetime: 50,000 hours
- Ambient temperature: Ta = 0°C...+40°C
- Degree of protection: IP42 or IP65, IK08
- Dimmensions: 356 x 136 x 79 mm
- Universal pictogram is included in each single box (1 piece)
- LED indicator signalizes mains power supply and battery charge
- Deep discharge protection
- Accessories: wall steel bracket, ceiling steel bracket, ceiling steel bracket with pipe, wire guard


wire guard



Dimmensions

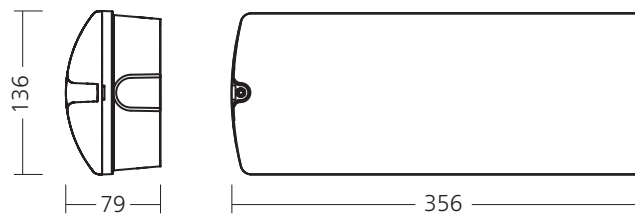

Mounting



220-240V
50-60Hz

LED

CCT
6000
K

IP
42

IP
65

IK
08

d = 25 m
VISIBILITY

TYPE	POWER (W)	DURATION (h)	MAINTENANCE		OPTIONS	
			NON MAINTAINED	MAINTAINED	MANUAL TEST BUTTON	AUTOTEST
HELIOS	1	3	•	•	•	•
HELIOS	2	3	•	•	•	•