

Lambda Asymmetric

Suspended asymmetric luminaire

Product description

The Lambda Asymmetric luminaire seamlessly blends clean design with practical functionality, making it ideal for task-oriented places like walls, blackboards, etc. Its form, hailing from the Lambda range, offers unobtrusive elegance, while its simple installation.


But beneath its clear aesthetic lies a powerhouse of performance. The asymmetric light distribution directs illumination precisely where it's needed, enhancing visual comfort and focus. Plus, the optional DALI control empowers users to personalize their lighting preferences, fostering a productive and adaptable work environment.

With a lifespan exceeding 100,000 hours, this luminaire is built to shine brightly for years to come, providing long-lasting and reliable performance that reduces maintenance costs and environmental impact.

Technical features:


- Optical system: asymmetric matt reflector
- Housing: sheet steel
- Reflector: matt anodised aluminium
- Accesories: rope suspension
- Chromacity: 3-step MacAdam
- Colour rendering index: min. 80
- Colour temperature: 3000K, 4000K
- Electronic control gear: FIX (ECG), DALI (EDA)
- Service lifetime: 100,000 hours/L90/B10 (ta 25°C)
- Ambient temperature: Ta = -25°C...+35°C
- Degree of protection: IP20
- Dimmensions: 1300 x 120 x 60 mm

Photometry

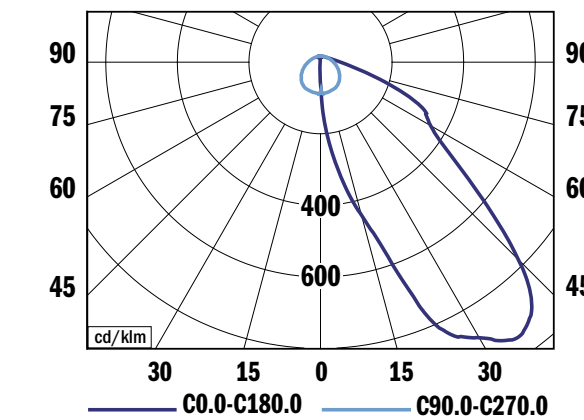


LAMBDA ASYMMETRIC M, 2450 lm 4000 K
LOR = 100%
lower flux fraction 100%
upper flux fraction 0%

Dimensions

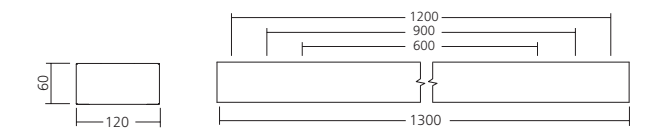

Mounting



220-240V 50-60Hz	LED	CHROMATICITY 3 SDCM	CRI 80+ Ra
CCT 3000 K	CCT 4000 K	ECG	EDA DALI
IP 20			

TYPE	NET LUMEN OUTPUT (at Ta = 25 °C) (lm)	POWER CONSUMPTION (W)	SYSTEM EFFICACY (lm/W)	COLOUR RENDERING INDEX	CORRELATED COLOUR TEMPERATURE (K)	WEIGHT (kg)
LAMBDA ASYMMETRIC	2350	22	107	80+	3000	4.8
LAMBDA ASYMMETRIC	2450	22	111	80+	4000	4.8