

Lambda Dif

Surfaced or suspended luminaire with diffuser

Product description


The Lambda Dif luminaire stuns with its clever design. Offered in two distinct styles, it can be either surface-mounted or suspended, seamlessly adapting to your space. A PMMA diffuser graces its form, softly dispersing light for a balanced and inviting ambiance. This thoughtful design makes Lambda Dif a versatile and elegant addition to any environment. Its form, hailing from the Lambda range, offers unobtrusive elegance. The optional DALI control also empowers users to personalize their lighting preferences, fostering a productive and adaptable work environment.

With a lifespan exceeding 100,000 hours, this luminaire is built to shine brightly for years, providing long-lasting and reliable performance that reduces maintenance costs and environmental impact.

Technical features:


- Optical system: microprismatic diffuser
- Housing: sheet steel
- Diffuser: PMMA
- Accesories: rope suspension
- Chromacity: 3-step MacAdam
- Colour rendering index: min. 80
- Colour temperature: 3000K, 4000K
- Electronic control gear: FIX (ECG), DALI (EDA), on request Emergency unit variant
- Service lifetime: 100,000 hours/L90/B10 (ta 25°C)
- Ambient temperature: Ta = -25°C...+35°C
- Degree of protection: IP20
- Dimmensions: Surfaced M 1260 x 123 x 67 mm, L 1560 x 123 x 67 mm, Suspended M 1260 x 120 x 60 mm, L 1560 x 120 x 60 mm

Photometry

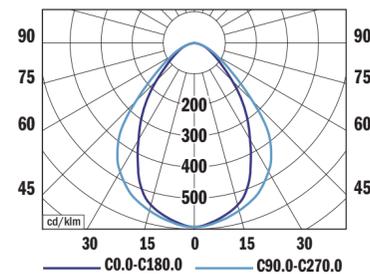

LAMBDA DIF L, 3600 lm 4000 K
LOR = 100%
lower flux fraction 100%
upper flux fraction 0%
UGR < 22


Dimmensions

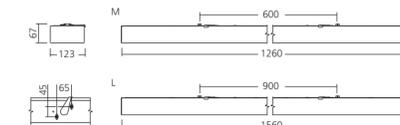


Mounting



Dimmensions

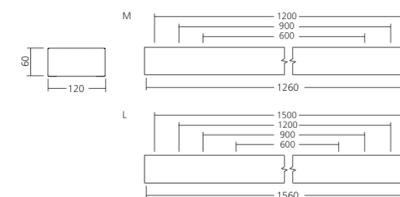

Mounting

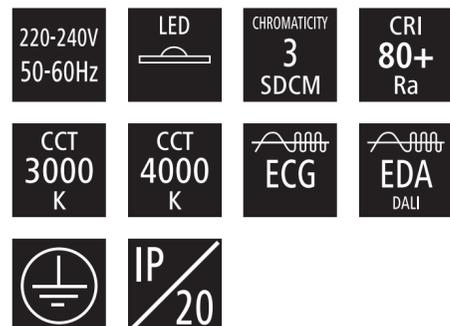

TYPE	NET LUMEN OUTPUT (at Ta = 25 °C) (lm)	POWER CONSUMPTION (W)	SYSTEM EFFICACY (lm/W)	COLOUR RENDERING INDEX	CORRELATED COLOUR TEMPERATURE (K)	BEAM ANGLE	WEIGHT (kg)
LAMBDA DIF M	3450	26	133	80+	3000	70°, 90°	4.7
LAMBDA DIF M	3600	26	138	80+	4000	70°, 90°	4.7
LAMBDA DIF L	5000	38	132	80+	3000	70°, 90°	5.7
LAMBDA DIF L	5250	38	138	80+	4000	70°, 90°	5.7