

Miline Freestanding

Design freestanding luminaire


Product description

The Miline Freestanding luminaire is designed to be the perfect lighting solution for modern offices. It boasts a unique direct-indirect light distribution, providing task lighting and ambient illumination. The direct portion utilizes a combination of lenses and louvers to ensure focused illumination on desks and work surfaces, while the indirect component employs an opal diffuser to bathe the room in soft, diffused light. This combination creates a comfortable and productive work environment. Additionally, the Miline Freestanding features a convenient touch-dimming function, allowing users to easily adjust the light level to their preference.

Technical features:


- Mounting: Freestanding
- Optical system:
DIRECT: lenses + white louver (LWL), on request black louver (LBL)
INDIRECT: opal diffuser
- Light distribution: direct-indirect
- Housing: die-cast aluminium + sheet steel
- Lenses: PMMA
- Louver: polycarbonate
- Diffuser: PMMA
- Chromacity: 3-step MacAdam
- Colour rendering index: min. 80
- Colour temperature: 4000K, on request 3000K
- Electronic control gear: TOUCH DIM (ETD)
- Service lifetime: 100,000 hours/L80/B10 (ta 25°C)
- Ambient temperature: Ta = -25°C...+35°C
- Degree of protection: IP20
- Dimmensions: 800 x 350 x 2000 mm

Photometry

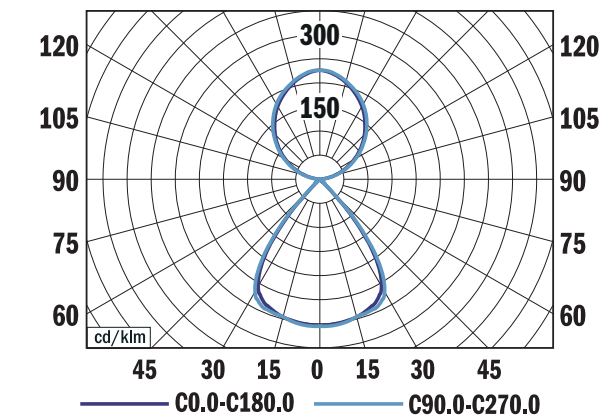


MILINE FREESTANDING, 10,500 lm 4000 K
LOR = 100%
lower flux fraction 42%
upper flux fraction 58%
UGR < 19

Dimensions

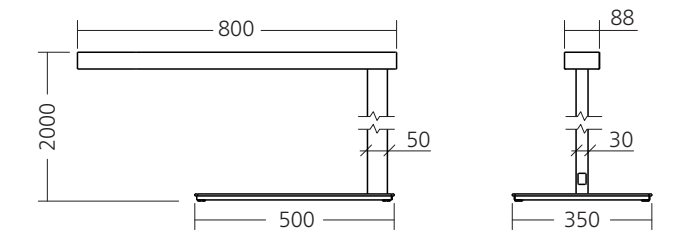

Mounting



white louver (LWL)



black louver (LBL)



TYPE	NET LUMEN OUTPUT (at Ta = 25 °C) (lm)	POWER CONSUMPTION (W)	SYSTEM EFFICACY (lm/W)	CRI	CCT (K)
MILINE FREESTANDING	10,500	76	138	80+	4000

