

Miline Slim Recessed

Design recessed luminaire with multiple beam angles




Product description

Discreetly illuminate your space with our versatile recessed luminaire. Choose from 3 beam angles to focus your space, and customize glare control with 2 louvre (white or black) options. Seamless integration and long-lasting performance make it perfect for any downlighting need. The optional DALI control empowers users to personalize their lighting preferences, fostering a productive and adaptable work environment.


Technical features:

- Optical system: lenses + white louvre (LWL), on request black louvre (LBL)
- Beam angle: 90°, on request 65° or asymmetric
- Housing: sheet steel
- Lenses: PMMA
- Louvre: polycarbonate
- Chromaticity: 3-step MacAdam
- Colour rendering index: min. 80
- Colour temperature: 3000K, 4000K
- Electronic control gear: FIX (ECG), DALI (EDA), on request Emergency unit variant
- Service lifetime: 100,000 hours/L80/B10 (ta 25°C)
- Ambient temperature: Ta = -25°C...+35°C
- Degree of protection: IP20, optical part IP40
- Dimensions: M 1144 x 65 x 61 mm, L 1424 x 65 x 61 mm
- Cutout: M 1130 x 55 mm, L 1410 x 55 mm


Photometry

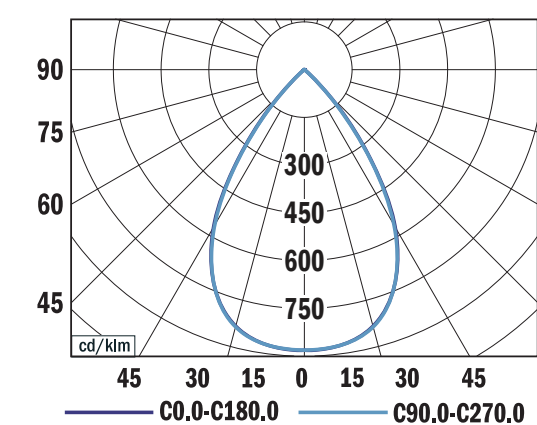

MILINE SLIM 65°, 3400 lm 4000 K
LOR = 100%, UGR < 19


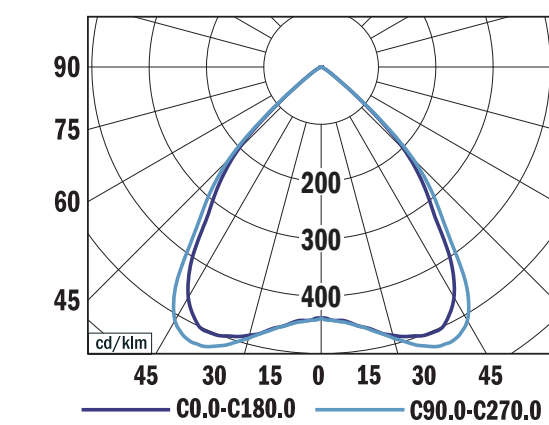


MILINE SLIM 90°, 3400 lm 4000 K
LOR = 100%
lower flux fraction 100%
upper flux fraction 0%
UGR < 19

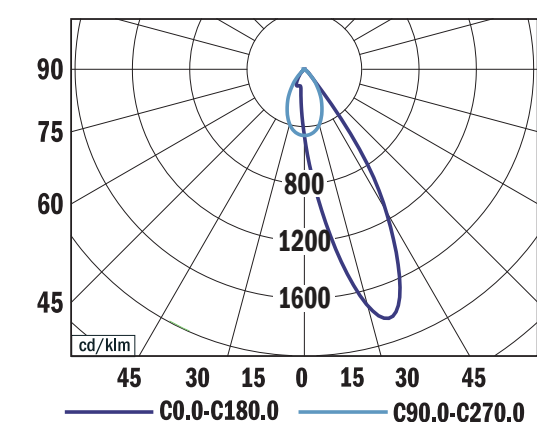

MILINE SLIM ASYMMETRIC, 3300 lm 4000 K
LOR = 100%

Dimensions

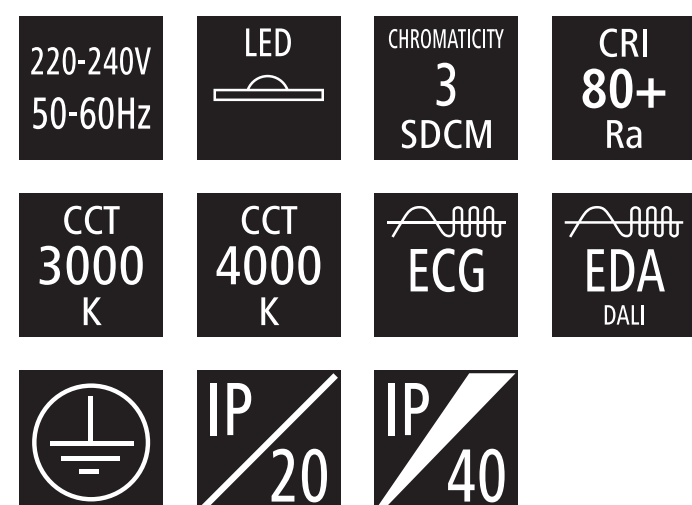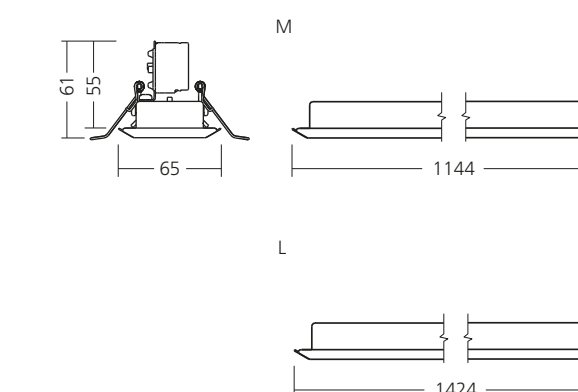

white louvre (LWL)



black louvre (LBL)



TYPE	NET LUMEN OUTPUT (at Ta = 25 °C) (lm)	POWER CONSUMPTION (W)	SYSTEM EFFICACY (lm/W)	COLOUR RENDERING INDEX	CORRELATED COLOUR TEMPERATURE (K)	WEIGHT (kg)
MILINE SLIM RECESSED M	3250	22	148	80+	3000	1.5
MILINE SLIM RECESSED M	3400	22	155	80+	4000	1.5
MILINE SLIM RECESSED M	4550	30	152	80+	3000	1.5
MILINE SLIM RECESSED M	4800	30	160	80+	4000	1.5
MILINE SLIM RECESSED L	4050	26	156	80+	3000	1.7
MILINE SLIM RECESSED L	4300	26	165	80+	4000	1.7
MILINE SLIM RECESSED L	5650	37	152	80+	3000	1.7
MILINE SLIM RECESSED L	6000	37	162	80+	4000	1.7

Mounting

