


# Prestige LSP LEW

The lenses luminaire for the Prestige trunking system



|                     |                  |                           |                  |
|---------------------|------------------|---------------------------|------------------|
| 220-240V<br>50-60Hz | LED              | CHROMATICITY<br>3<br>SDCM | CRI<br>80+<br>Ra |
| CCT<br>3000<br>K    | CCT<br>4000<br>K | ECG                       | EDA<br>DALI      |
| IP<br>20            |                  |                           |                  |

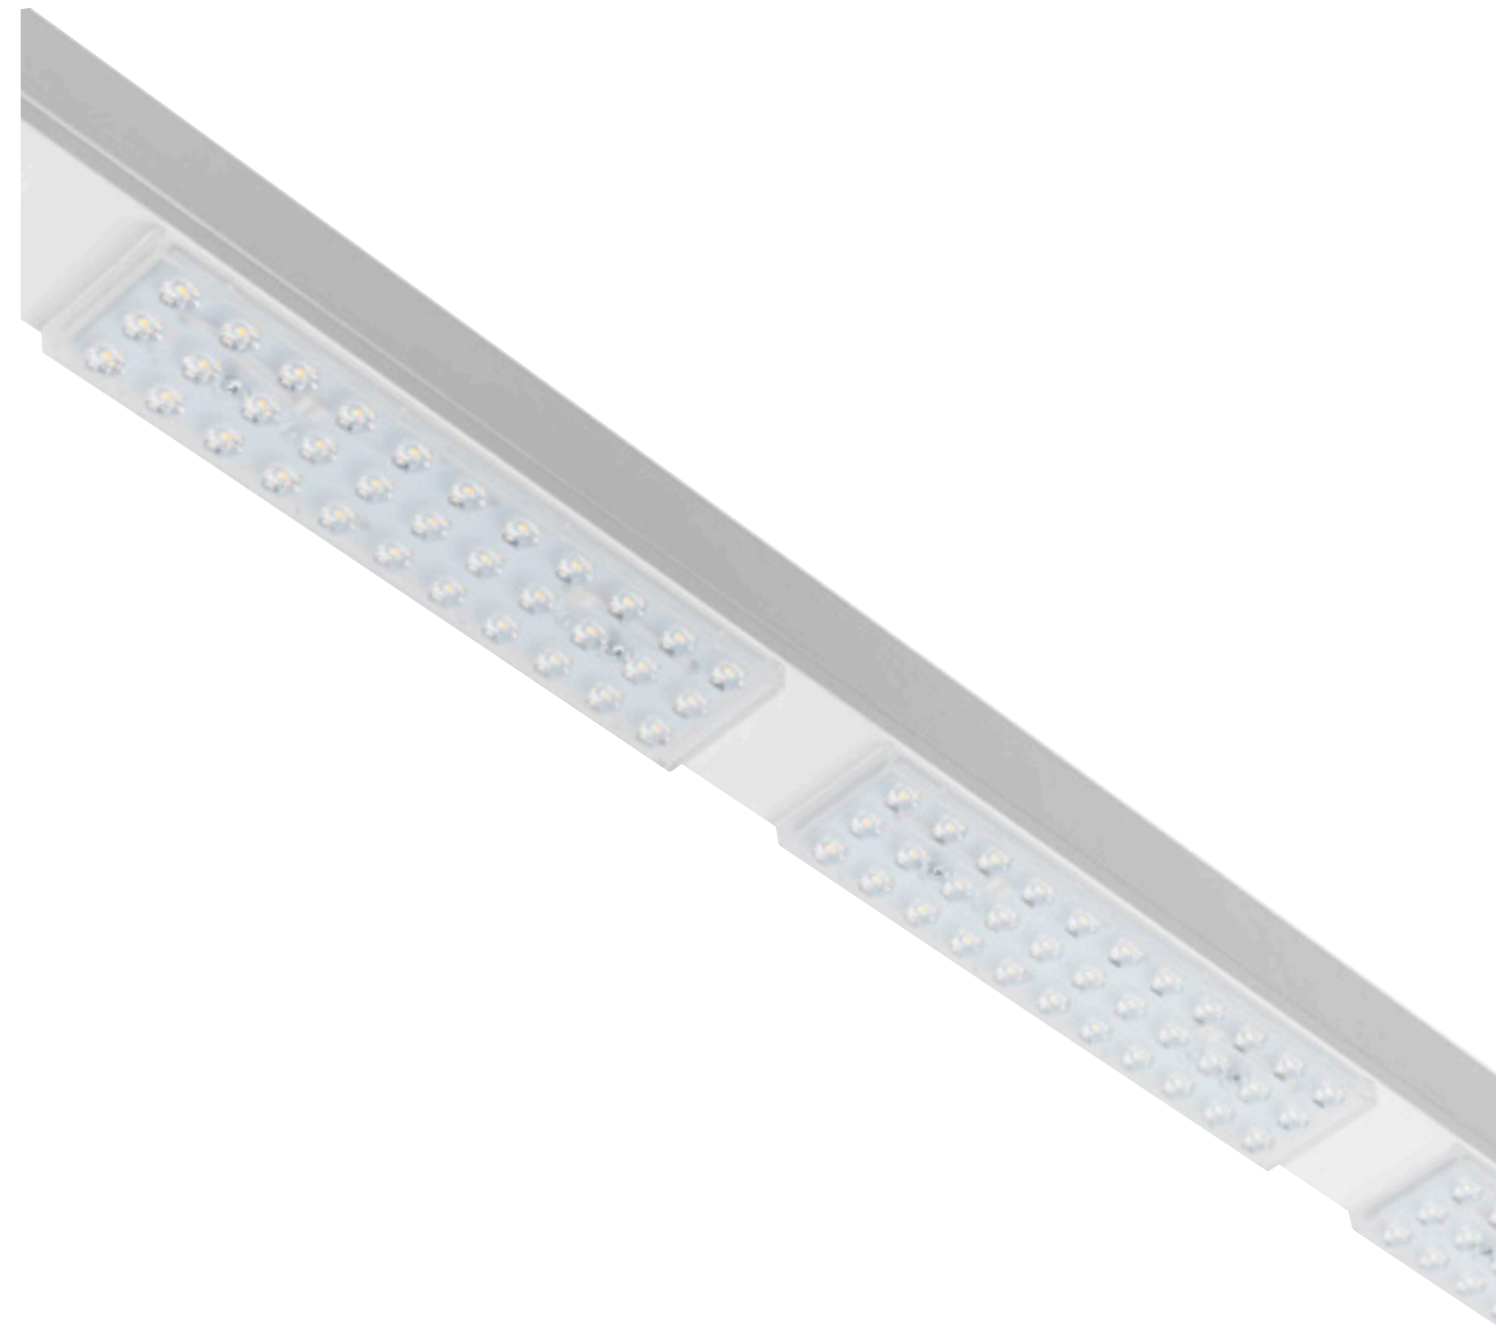

### Product description

PRESTIGE isn't just a lighting system; it's the future. Utilizing high-powered LEDs and advanced optical systems, PRESTIGE delivers efficient light distribution, making it suitable for diverse applications and spaces.

Choose between surfaced or suspended mounting, and take advantage of easily connectable pre-wired rails, end pieces, and covers. Whether you need a luminaire with or without accessories, PRESTIGE adapts to your needs. The system allows for beam angle customization through various lenses or diffusers, ensuring perfect illumination for any environment.


### Technical features:

- Optical system: extra wide lenses (LEW)
- Housing: sheet steel
- Lenses: PMMA (IP54)
- Accessories: components for system PRESTIGE
- Chromaticity: 3-step MacAdam
- Colour rendering index: min. 80
- Colour temperature: 3000K, 4000K
- Electronic control gear: FIX (ECG), DALI (EDA), on request Emergency unit variant
- Service lifetime: 100,000 hours/L90/B50 (ta 25°C) - 41/72W  
100,000 hours/L80/B10 (ta 25°C) - 92W
- Ambient temperature: Ta = -25°C...+35°C
- Degree of protection: IP20
- Dimensions: 1482 x 69 x 26 mm

Other performance variants on request.


| TYPE             | NET LUMEN OUTPUT<br>(at Ta = 25 °C)<br>(lm) | POWER CONSUMPTION<br>(W) | SYSTEM EFFICACY<br>(lm/W) | COLOUR RENDERING INDEX | CORRELATED COLOUR TEMPERATURE<br>(K) | BEAM ANGLE | WEIGHT<br>(kg) |
|------------------|---|--------------------------|---------------------------|------------------------|--------------------------------------|------------|----------------|
| PRESTIGE LSP LEW | 6050  | 41                       | 148                       | 80+                    | 3000                                 | 85°        | 2.5            |
| PRESTIGE LSP LEW | 6350  | 41                       | 155                       | 80+                    | 4000                                 | 85°        | 2.5            |
| PRESTIGE LSP LEW | 10,900                                      | 72                       | 151                       | 80+                    | 3000                                 | 85°        | 2.5            |
| PRESTIGE LSP LEW | 11,100                                      | 72                       | 154                       | 80+                    | 4000                                 | 85°        | 2.5            |
| PRESTIGE LSP LEW | 14,600                                      | 92                       | 159                       | 80+                    | 3000                                 | 85°        | 2.6            |
| PRESTIGE LSP LEW | 15,200                                      | 92                       | 165                       | 80+                    | 4000                                 | 85°        | 2.6            |

### Photometry

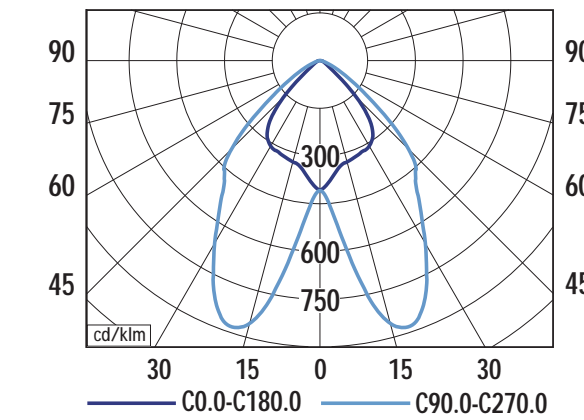

PRESTIGE LSP LEW, 6350 lm 4000 K  
LOR = 100%  
lower flux fraction 100%  
upper flux fraction 0%  
UGR < 22 / < 25

### Dimensions



### Mounting

