

Relax Asymmetric

Recessed asymmetric luminaire

Product description

The Relax Asymmetric luminaire combines sleek design with targeted functionality, ideal for illuminating task-oriented areas like walls and blackboards. Its unique asymmetric light distribution directs brightness precisely where needed, minimizing glare and maximizing visual comfort for enhanced focus.


Empower personalization in your workspace with the optional DALI control, allowing users to adjust lighting to their individual preferences. This fosters a productive and adaptable environment that caters to diverse needs.

Installation is a breeze with the luminaire's compatibility with T bar ceiling or variant for plasterboard. The standard Wieland connector ensures a quick and seamless connection.

Technical features:


- Optical system: asymmetric matt reflector
- Housing: sheet steel
- Reflector: matt anodised aluminium
- Chromaticity: 3-step MacAdam
- Colour rendering index: min. 80
- Colour temperature: 3000K, 4000K
- Electronic control gear: FIX (ECG), DALI (EDA)
- Wiring : connector WIELAND
- Service lifetime: 100,000 hours/L80/B10 (ta 25°C)
- Ambient temperature: Ta = -20°C...+35°C
- Degree of protection: IP20
- Dimensions: S 595 x 123 x 83 mm, M 1195 x 123 x 83 mm
- Cutout: S 580 x 110 mm, M 1180 x 110 mm

Photometry

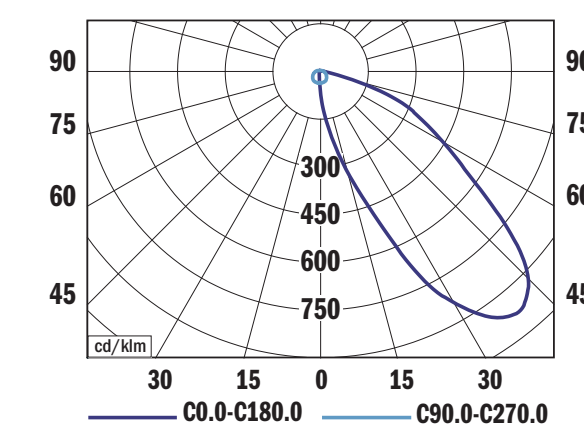


RELAX ASYMMETRIC M, 3800 lm 4000 K
 LOR = 100%
 lower flux fraction 100%
 upper flux fraction 0%

Dimensions

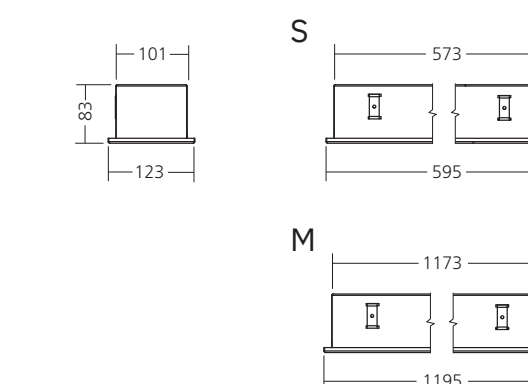

Mounting

RCD
 (600 x 600)

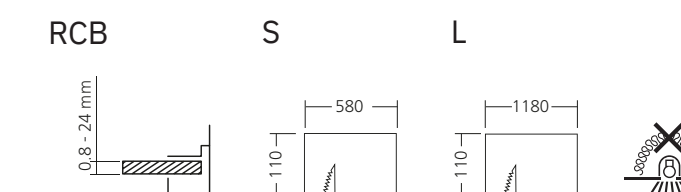

220-240V 50-60Hz	LED	CHROMATICITY 3 SDCM	CRI 80+ Ra
CCT 3000 K	CCT 4000 K	ECG	EDA DALI
IP 20			

TYPE	NET LUMEN OUTPUT (at Ta = 25 °C) (lm)	POWER CONSUMPTION (W)	SYSTEM EFFICACY (lm/W)	COLOUR RENDERING INDEX	CORRELATED COLOUR TEMPERATURE (K)	WEIGHT (kg)
RELAX ASYMMETRIC S	2000	23	87	80+	3000	2.0
RELAX ASYMMETRIC S	2100	23	91	80+	4000	2.0
RELAX ASYMMETRIC M	3700	37	100	80+	3000	3.5
RELAX ASYMMETRIC M	3800	37	103	80+	4000	3.5