

rope suspension RS-S 67



Tempera IP66

Industrial-grade luminaire for demanding applications

Product description


The Tempera IP66 luminaire is a versatile lighting solution for any space, available in two lengths (1200mm, 1500mm). With an IP66 rating, it's resistant to dust and water, and its IK08 impact resistance rating makes it ideal for demanding environments. It can even be equipped with an emergency backup unit to provide light during power outages. An available version with an integrated sensor offers even more benefits for a comprehensive lighting solution.

Technical features:

- Mounting: Surfaced / Suspended
- Optical system: opal diffuser
- Beam angle: 120°, 100°
- Housing: polycarbonate
- Diffuser: polycarbonate
- Clips: stainless steel (INOX)
- Accesories: rope suspension RS-S 67
- Chromacity: 3-step MacAdam
- Colour rendering index: min. 80
- Colour temperature: 4000K, on request 3000K
- Electronic control gear: FIX Manually settable (SCG), DALI (EDA), on request Emergency unit, Microwave Sensor


TYPE	NET LUMEN OUTPUT (at Ta = 25 °C) (lm)	POWER CONSUMPTION (W)	SYSTEM EFFICACY (lm/W)	CRI	CCT (K)
TEMPERA IP66 M	2150/2600/3100/3550	15/18/21/24	143-148	80+	4000
TEMPERA IP66 M	3150/3850/4600/5200	20/25/30/35	149-158	80+	4000
TEMPERA IP66 L	4400/5400/6400/7300	28/35/42/50	146-157	80+	4000
TEMPERA IP66 L	7350/8150/9650	50/57/71	136-147	80+	4000
TEMPERA IP66 L	9600/10,650	64/73	146-150	80+	4000
TEMPERA IP66 M	3550	24	148	80+	4000
TEMPERA IP66 M	5200	35	149	80+	4000
TEMPERA IP66 L	7300	50	146	80+	4000
TEMPERA IP66 L	9650	71	136	80+	4000
TEMPERA IP66 L	10,650	73	146	80+	4000

Photometry

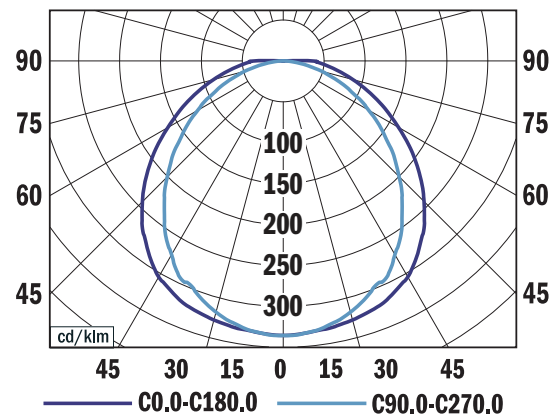


TEMPERA IP66 M, 5200 lm 4000 K
LOR = 100%
lower flux fraction 100%
upper flux fraction 0%
UGR < 28

Dimmensions

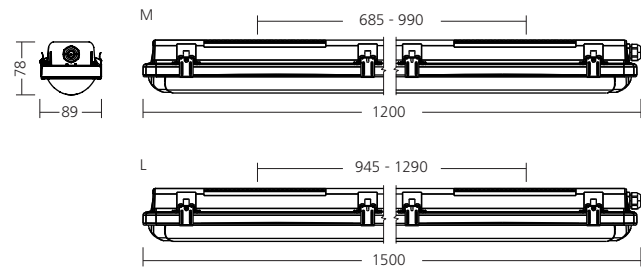

Mounting



- Service lifetime: 50,000 hours/L80/B50 (ta 25°C)
- Ambient temperature: Ta = -40°C...+55°C
- Degree of protection: IP66, IK08
- Dimmensions: M 1200 x 89 x 78 mm L 1500 x 89 x 78 mm



* Luminous flux tolerance +/- 10%. The Company reserves the right to change any product specifications without prior notification.