


Truxian

Simple industrial luminaire

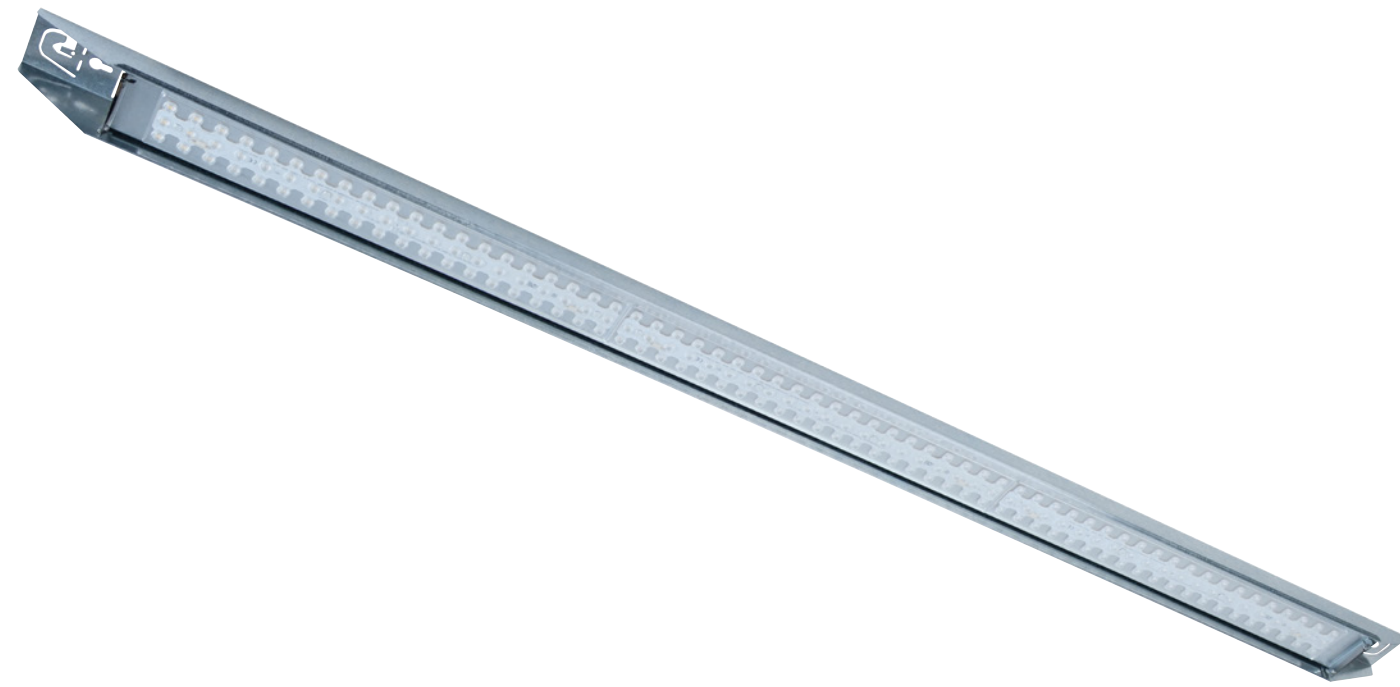


Product description

This open industrial luminaire shines brilliantly while saving you money. Its robust steel body and IP23 rating make it tough enough for any job. Enjoy clear, flicker-free light with over 95% lens efficiency and minimal setup time. High efficacy up to 158 lm/W, different optical solutions and on-request through wiring versions make a perfect solution for your space. Perfect for production facilities, warehouses, workshops, shops, and more. Invest in the future of industrial lighting today!




Technical features:

- Mounting: Surfaced / Suspended
- Optical system: lenses medium (LME), lenses extra wide (LEW), lenses corridor (LCO)
- Beam angle: 80° (LME), 100°, 110°(LEW), 97°, 90°(LCO)
- Housing: sheet steel
- Lenses: PMMA
- Chromacity: 3-step MacAdam
- Colour rendering index: min. 80
- Colour temperature: 4000K
- Electronic control gear: FIX (ECG), on request through wiring
- Service lifetime: 60,000 hours/L80/B10 (ta 25°C)
- Degree of protection: IP23, IK07
- Dimensions: M 1245 x 95 x 53 mm, L 1365 x 95 x 53 mm, XL 1745 x 95 x 53 mm, XXL 1945 x 95 x 53 mm

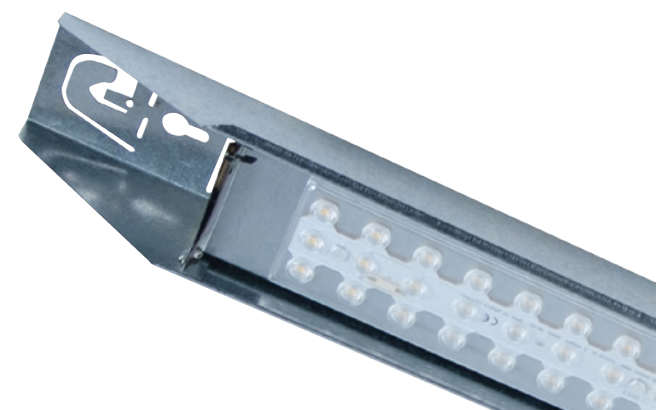


TYPE	NET LUMEN OUTPUT (at Ta = 25 °C) (lm)	POWER CONSUMPTION (W)	SYSTEM EFFICACY (lm/W)	CRI	CCT (K)
TRUXIAN M	9800	63	156	80+	4000
TRUXIAN L	14,500	97	150	80+	4000
TRUXIAN XL	14,800	94	158	80+	4000
TRUXIAN XXL	21,700	146	149	80+	4000

Photometry

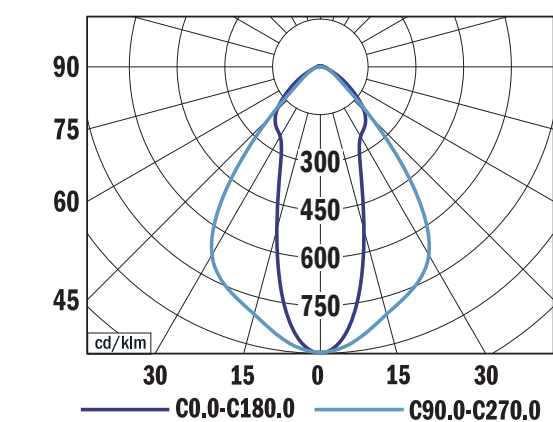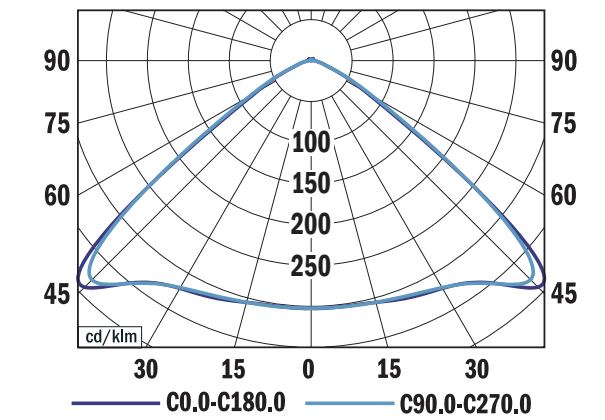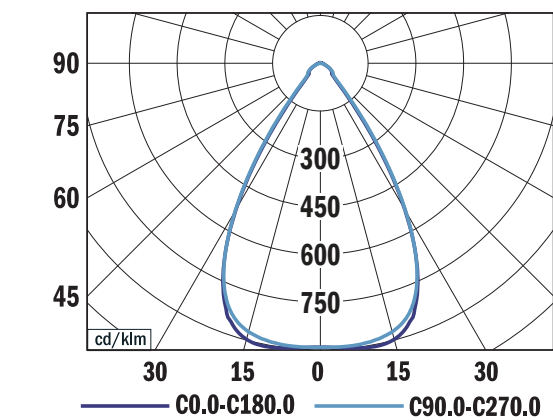

Dimensions

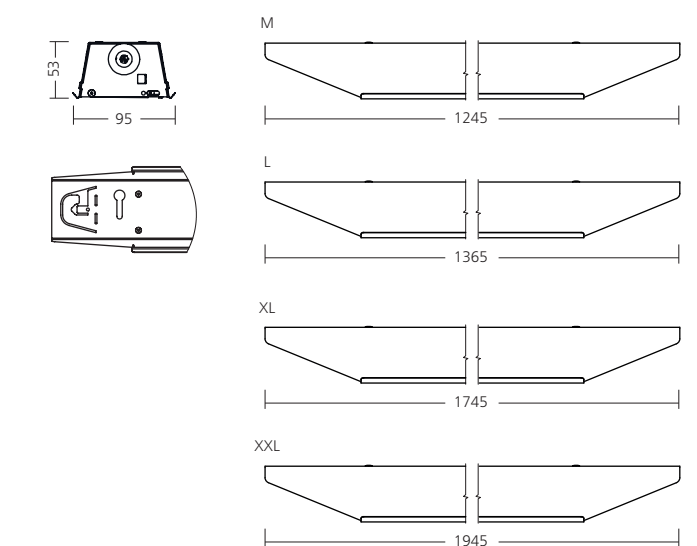

Mounting

