



CELESTIALLO

Celestiallo is a versatile outdoor luminaire designed for recessed ceiling installation. Offering five distinct optical beams – spot, medium, flood, elliptic, and grazing – it caters to diverse lighting needs. This innovative fixture comes in four sizes, ranging from compact S (130mm) to expansive XL (900mm), ensuring suitability for various spaces. With options for recessed, flush, or protruding mounting, Celestiallo provides maximum flexibility. Its IP67 rating guarantees protection against water ingress, while the IK10 rating ensures resistance to impacts, making it ideal for outdoor environments.

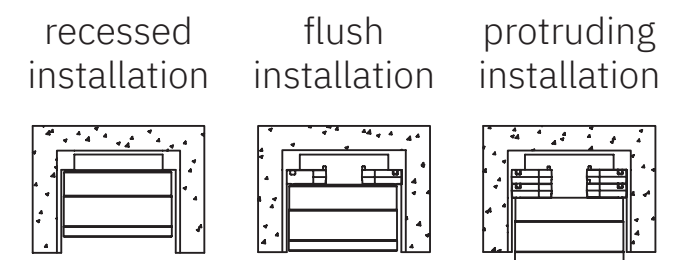

XL

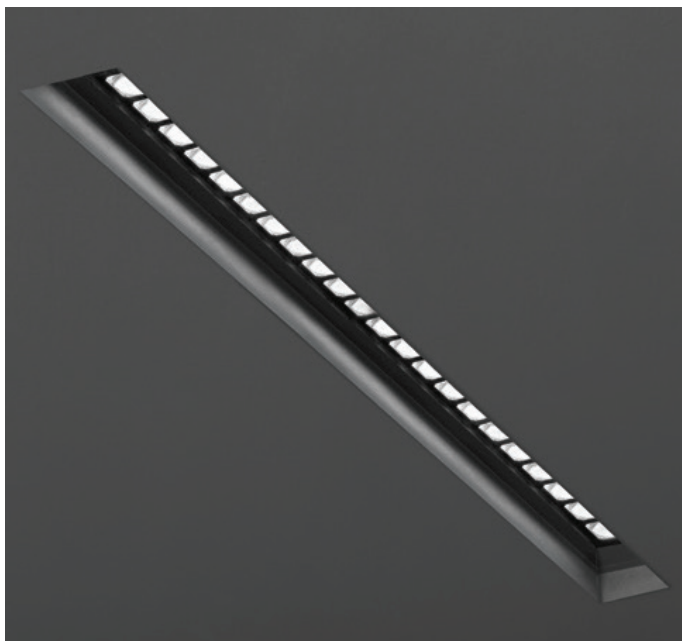

S



M



L



- Service Lifetime (Ta 40°C)
- Dimensions (L x W x H)

60,000 hours/L80/B15
S 135 x 110 x 95 mm
M 330 x 110 x 95 mm
L 612 x 110 x 95 mm
XL 895 x 110 x 95 mm

- Net Lumen Output (at Ta=25°C)
 - S 610 lm, 589 lm, 490 lm, 592 lm, 515 lm
 - M 1741 lm, 1783 lm, 1657 lm, 1896 lm, 1718 lm
 - L 3638 lm, 3566 lm, 3314 lm, 3792 lm, 3436 lm
 - XL 4693 lm, 4660 lm, 4275 lm, 4892 lm, 4432 lm
- Power Consumption
 - S 8 W, M 24 W, L 43 W, XL 60 W
- System Efficacy
 - 61-88 lm/W
- Chromacity
 - 3-step MacAdam
- Colour rendering index
 - > 90
- Colour temperature
 - 3000 K, on request 2200 K, 2700 K, 4000 K, RGBW
- Wiring
 - FIX, on request dimmable
- Optical System
 - Lenses
 - spot 12°
 - medium 30°,
 - flood 45°
 - elliptic 25° x 60°
 - wgrazing 25° x 60° x ß10°
- Beam Angle
- Materials
 - Housing: Extruded aluminium
 - Cover: Extra clear glass
- Surface Finish
 - Polyester powder paint