



LUNALUX

Lunalux is a minimalist luminaire designed for outdoor use. It can be mounted on walls or ceilings, which offers versatile installation options. Blending timeless aesthetics with cutting-edge technology, this luminaire is a testament to rigorous research and development. Its classic form conceals advanced engineering, delivering both exceptional performance and visual appeal. The optical component, an opal glass diffuser, emits a soft, even glow. Engineered for durability, the luminaire boasts IP67 weather resistance and IK10 impact protection, ensuring long-lasting performance in outdoor environments.

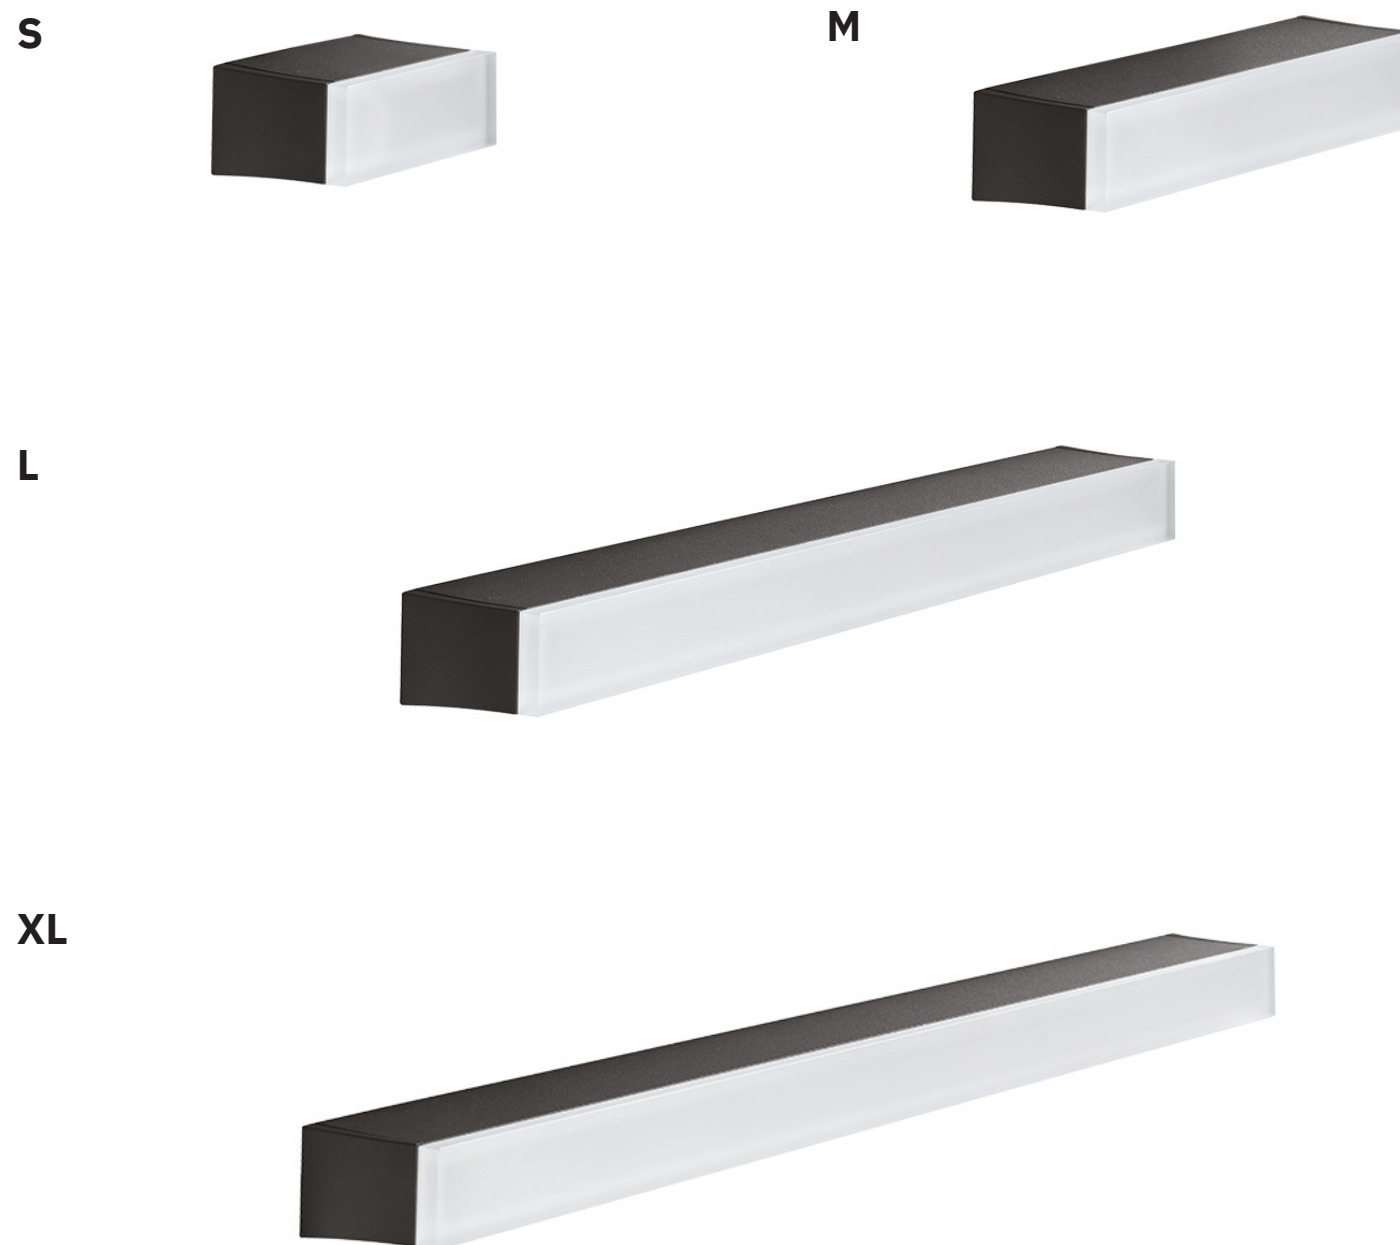

- Net Lumen Output (at Ta=25°C) S 115 lm, M 510 lm, L 1020 lm, XL 1294 lm
- Power Consumption S 4 W, M 16 W, L 30 W, XL 38 W
- System Efficacy 29-34 lm/W
- Chromacity 3-step MacAdam
- Colour rendering index > 90
- Colour temperature 3000 K, on request 2200 K, 2700 K, 4000 K, RGBW
- Wiring FIX
on request dimmable (M, L, XL)
- Optical System Diffuser
- Beam Angle 120°
- Materials Housing: Extruded aluminium
Diffuser: Opal glass
- Surface Finish Polyester powder paint
- Service Lifetime (Ta 40°C) 60,000 hours/L80/B15
- Dimmensions (L x W x H) S 130 x 47 x 77 mm
M 318 x 47 x 77 mm
L 600 x 47 x 77 mm
XL 882 x 47 x 77 mm

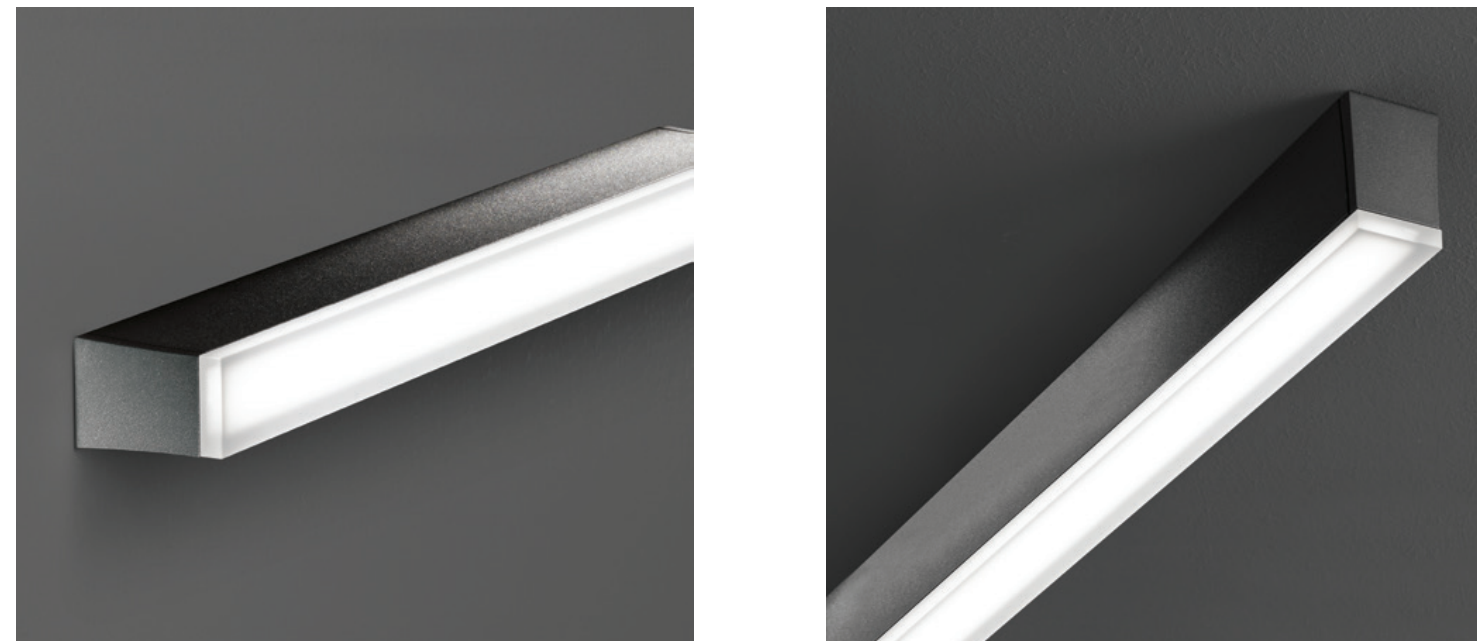