


POLARISTO

Polaristo is a versatile wall-mounted luminaire designed for outdoor environments. Its sleek, square form with softened corners offers a modern aesthetic.

The direct lighting distribution allows for a choice of two beam angles, the direct-indirect variant brings an additional combination of these two beam angles offering customized light spread.

Protected by a PMMA reflector cover, this luminaire is not only visually appealing but also durable and efficient, making it a clever and functional choice for outdoor lighting needs.

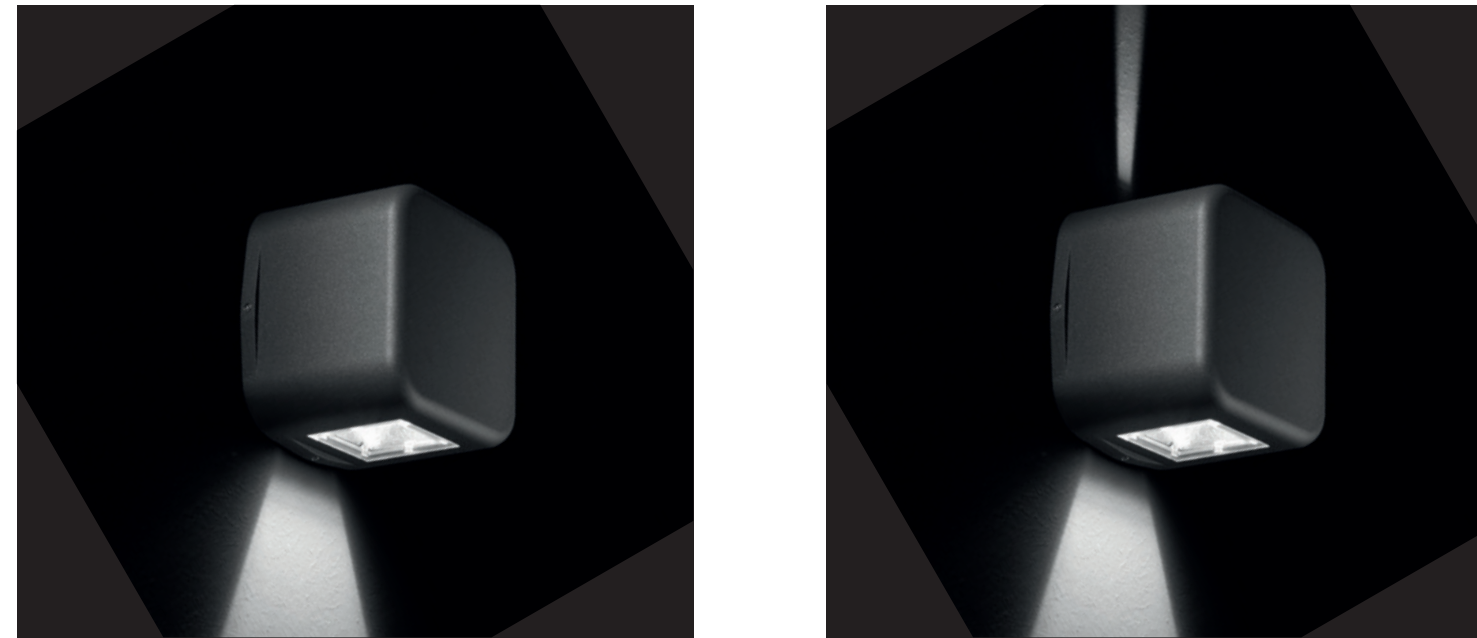

- | | |
|---------------------------------|---|
| • Light Distribution | direct
direct-indirect |
| • Net Lumen Output (at Ta=25°C) | D 15 lm, 26 lm, 128 lm, 250 lm
D-I 30 lm, 256 lm, 143 lm |
| • Power Consumption | 6 W, 9 W |
| • System Efficacy | 3-28 lm/W |
| • Chromacity | 3-step MacAdam |
| • Colour rendering index | > 90 |
| • Colour temperature | 3000 K, on request 2200 K,
2700 K, 4000 K, RGBW |
| • Wiring | FIX, on request dimmable |
| • Optical System | Reflector |
| • Beam Angle | Direct:
spot 10°, flood 45°
Direct-indirect:
double spot 10°,
double wide flood 45°,
wide flood 45° / spot 10° |
| • Materials | Housing: Die-cast aluminium
Cover: Extra clear PMMA |
| • Surface Finish | Polyester powder paint |
| • Service Lifetime (Ta 40°C) | 60,000 hours/L80/B15 |
| • Dimmensions (L x W x H) | 124 x 90 x 124 mm |

220-240V 50-60Hz	LED	CHROMATICITY 3 SDCM	CRI 90+ Ra	CCT 3000 K	ECG	⊕	IP 65	IK 08
---------------------	-----	---------------------------	------------------	------------------	-----	---	----------	----------