

# RADIANCON

Radiancon is a luminaire that reimagines outdoor illumination. Its unique construction houses a powerful projector capable of delivering five distinct light beams: spot, medium, flood, grazing, and diffuse. This architectural luminaire offers unparalleled flexibility, with the ability to rotate 120° horizontally and 90° vertically. Whether illuminating a grand façade or creating subtle ground effects, adapts effortlessly. Its versatile installation options - ceiling, wall, floor, or ground-mounted - ensure a perfect fit for any outdoor environment. Experience the potential of Radiancon and transform your space.




M



L



XL

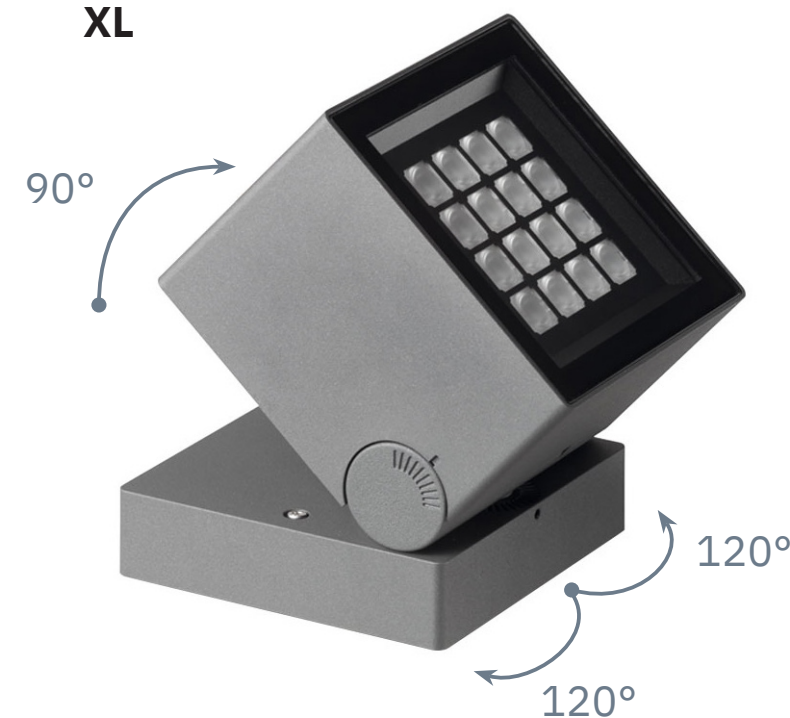

- Net Lumen Output (at Ta=25°C)
  - M 643 lm, 590 lm, 576 lm, 503 lm, 353 lm
  - L 1423 lm, 1332 lm, 1307 lm, 1211 lm, 882 lm
  - XL 2506 lm, 2333lm, 2342 lm, 2134 lm, 1480 lm
- Power Consumption
  - M 6 W, L 14W, XL 24 W
- System Efficacy
  - 59-107 lm/W
- Chromacity
  - 3-step MacAdam
- Colour rendering index
  - > 90
- Colour temperature
  - 3000 K, on request 2200 K, 2700 K, 4000 K, RGBW
- Wiring
  - FIX, on request dimmable
- Optical System
  - Lenses + diffuser or diffuser
- Beam Angle
  - spot 14°, medium 30°, flood 45°, grazing 25° x 60° x 110°
  - diffuse 120°
- Materials
  - Housing: Die-cast aluminium
  - Diffuser: Transparent glass or opal glass (diffuse version)
- Service Lifetime (Ta 40°C)
  - 60,000 hours/L80/B15
- Dimmensions (L x W x H)
  - M 90 x 90 x 90 mm
  - L 120 x 120 x 120 mm
  - XL 160 x 160 x 160 mm

