
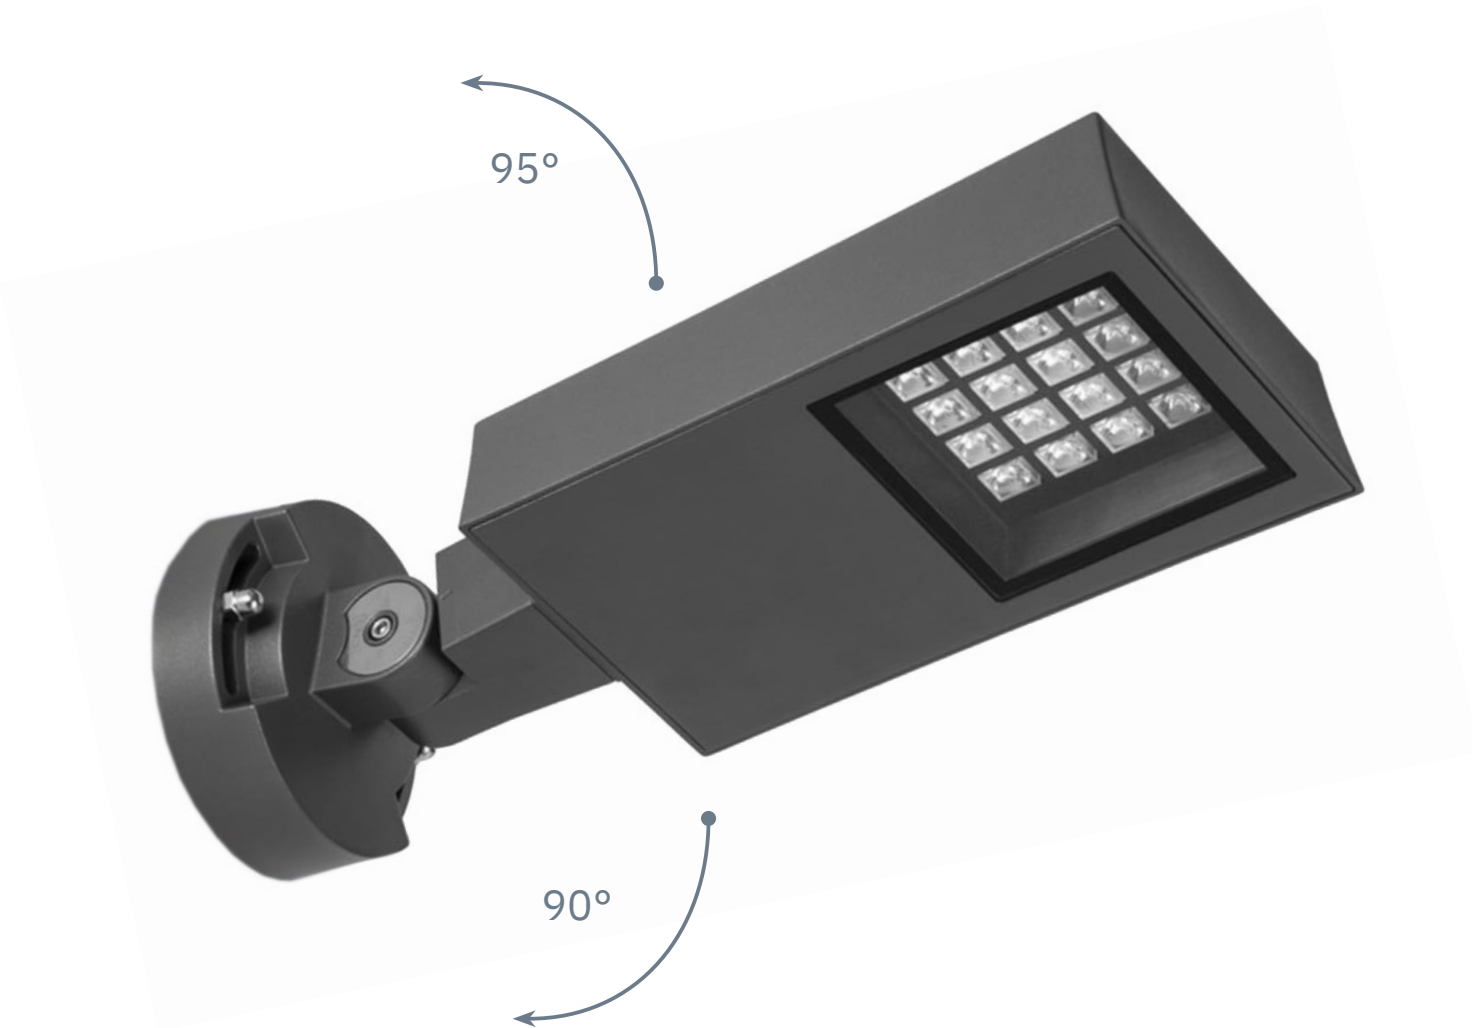


# STELARIS PROJECTOR

The Stelaris Projector is a highly adaptable outdoor luminaire designed to illuminate urban spaces. Powerful, ultra-durable, versatile. With a flexible +90°/-95° articulation, it can be positioned for optimal light distribution in wall, ceiling, or ground applications. IP66 and IK08 ratings ensure durability and resistance to environmental factors. Available in three gray finishes, it offers powerful, ultra-performance optics for both vehicular and pedestrian areas. Choose from projector or pole-mounted versions to suit your specific lighting needs.

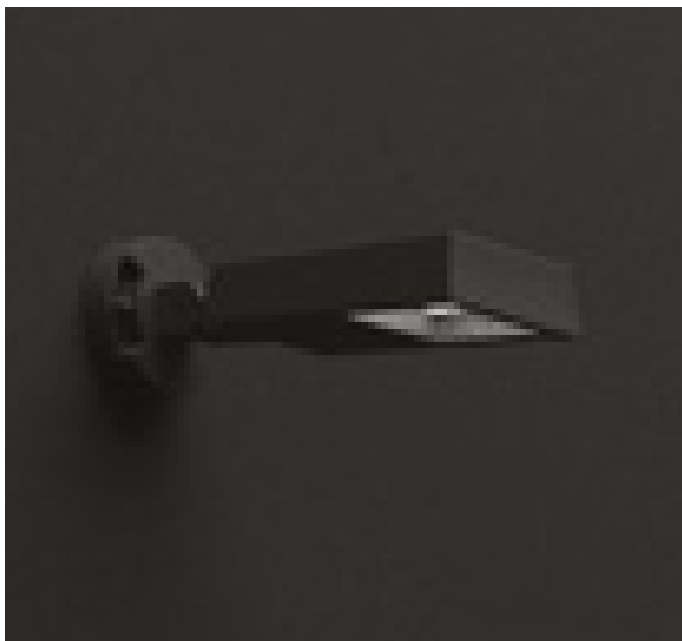

- Net Lumen Output (at Ta=25°C) 2770 lm, 3330 lm, 3490 lm, 2720 lm
- Power Consumption 27 W
- System Efficacy 103-125 lm/W
- Chromacity 3-step MacAdam
- Colour rendering index > 80
- Colour temperature 3000 K, on request 2200 K, 2700 K, 4000K, RGBW
- Wiring FIX, on request dimmable
- Optical System Lenses
- Beam Angle (C0-180, C90-270) elliptic 20° x 50°  
spot 15°  
medium 30°  
wide flood 70°
- Materials Housing: Die-cast aluminium  
Diffuser: Extra clear glass
- Surface Finish Polyester powder paint
- Service Lifetime (Ta 40°C) 60,000 hours/L80/B15
- Dimmensions (L x W x H) 452 x 200 x 126 mm

220-240V  
50-60Hz

LED

CHROMATICITY  
3  
SDCM

CRI  
80+  
Ra

CCT  
3000  
K

ECG

IP  
66

IK  
08