



SKAT Trax

The SKAT Trax luminaire offers unparalleled adjustability for your lighting needs. Unlike the other luminaires, SKAT boasts a wider range of light distribution options to perfectly suit your specific requirements. But the true standout feature is its adjustable lighting direction. The SKAT allows for horizontal swiveling of up to +/- 170° and even lets you adjust the optical parts themselves by up to 90°. This incredible flexibility ensures you can direct light exactly where it's needed. Maintaining the TRAX system's hallmark of ease, it mounts quickly and hassle-free, making it an adaptable lighting solution for any space.

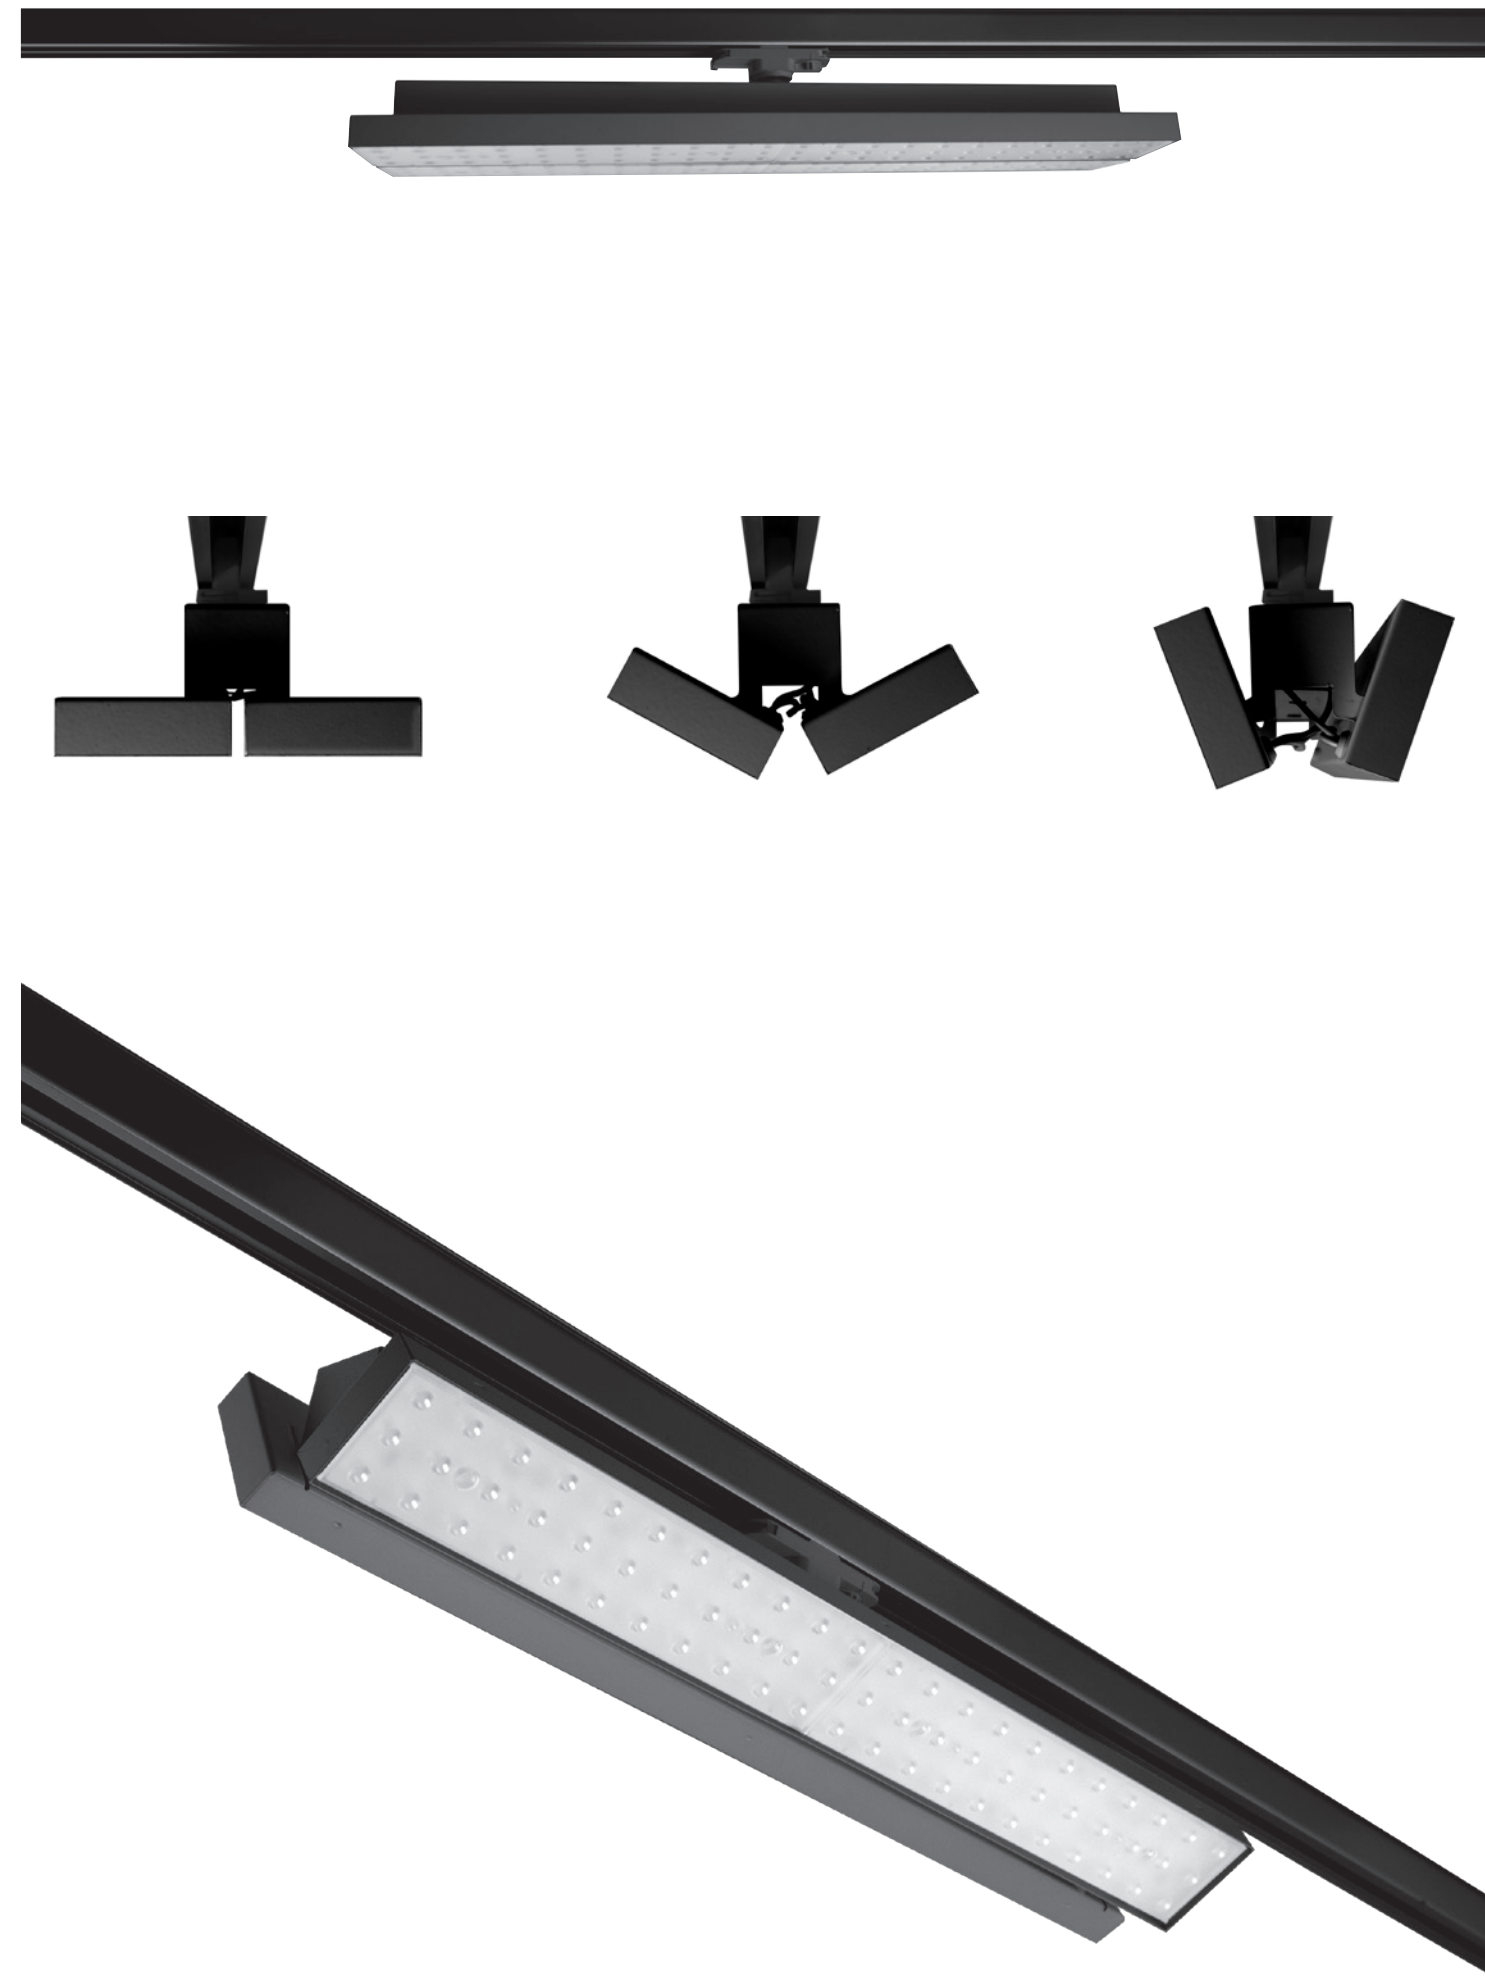

- Net Lumen Output (at Ta=25°C) 6200 lm, 6500 lm, 7000 lm, 7300 lm, 7800 lm, 8200 lm, 8600 lm, 9100 lm
- Power Consumption 47 W, 55 W, 63 W, 70 W
- System Efficacy 124-138 lm/W
- Chromacity 3-step MacAdam
- Colour rendering index > 80
- Colour temperature 3000 K, 4000 K
- Wiring FIX, DALI
- Optical System Lenses
- Beam Angle (C0-180, C90-270) 65°
- Materials Housing: sheet steel
Lenses: PMMA
- Surface Finish Black RAL 9005
- Service Lifetime (Ta 25°C) 100,000 hours/L80/B10
- Ambient Operating Temp. From -25 °C to +35 °C
- On Request other types of the lenses with different light distribution

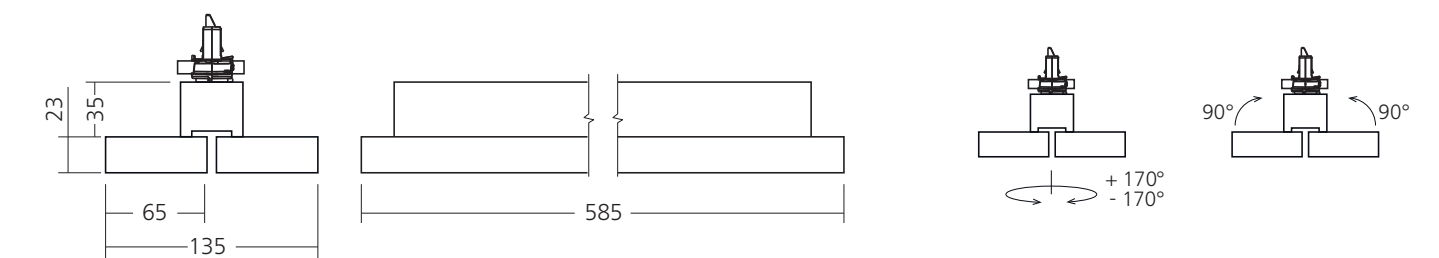

220-240V 50-60Hz	LED	CHROMATICITY 3 SDCM	CRI 80+ Ra	CCT 3000 K	CCT 4000 K	ECG	EDA DALI	IP 20
---------------------	-----	---------------------------	------------------	------------------	------------------	-----	-------------	----------